

## PL2303GE USB to Full UART IC With Integrated System-Level ESD Protection

### USB Interface

- Fully Compliant with USB 2.0 specification (Full-Speed Mode).
- UHCI/OHCI (USB 1.1), EHCI (USB 2.0), xHCI (USB 3.1) Host Controller Compatible.
- $\pm 15\text{kV}$  High ESD HBM (Human Body Model) Protection on USB Port (4-pin):
  - $\pm 15\text{kV}$  IEC 61000-4-2 Air Discharge
  - $\pm 8\text{kV}$  IEC 61000-4-2 Contact Discharge
- Provides royalty-free USB to Virtual Com Port (VCP) drivers for Windows, Mac, Linux, and Android.
- Highly integrated USB 1.1 FS Transceiver. Integrated termination resistors and pull-up resistor to reduce PCB external components.
- Supports 256-byte OTPROM (One-Time Programmable ROM) for USB device descriptors and GPIO custom configuration. OTPROM can be programmed directly through USB port.
- Each IC has unique ID (for Serial Number).
- Supports bus-power, self-power and high-power USB device configuration.
- Supports VBUS input detect function to attach USB host after VBUS is detected.
- Supports 3.3V VBUS voltage operation.
- Supports Windows USB Selective Suspend (Remote Wakeup enabled).
- Supports Windows Modern Standby.
- Bind a specific COM port number (1~65,535) and product string via OTPROM / EEPROM (no need to submit WHQL certification and pay additional fees).
- Expand COM port number range: from 1~255 to 1~65,535.

- “Product String” of OTP tool support multiple language.

### GPIO Interface

- Versatile GPIO functions and routing logic provides easy to use multi-I/O functions.
- Configurable I/O pin output driving strength.
- Total 16 General Purpose I/O (GPIO) pins can be used after configured.

Optional Clock Output to external MCU.

### UART Interface

- Supports Serial UART Interface:
  - RS232, RS422, RS485
  - Flexible baud rate support up to 12Mbps
  - 5, 6, 7 or 8 data bits
  - Odd, Even, Mark, Space, None parity mode
  - One, one and a half, or two stop bits
  - Hardware Flow Control (CTS/RTS and/or DSR/DTR)
  - Software Flow Control (XON/XOFF)
  - Configurable Remote Wakeup Pin
- 1024-byte bi-directional data FIFO buffers (768-byte receive/256-byte transmit) for faster data throughput. Configurable in OTPROM.
- Configurable Transmit and Receive LED pins.
- Suspend Pin control for RS232 transceiver.
- UART inverted signal configurable option.

### Battery Charger Detection

- Supports Battery Charger (BC1.2) Detection to enable fast charging of batteries.

---

**Product Data Sheet****PL2303GE**

---

**Miscellaneous**

- Integrated self-generated precise clock generator. External crystal is optional.
- Integrated Power-on-Reset (POR) circuit.
- Integrated 5V to 3.3V LDO that can support 80mA for external components.
- Low operating power and USB suspend current.
- Wide I/O voltage range (1.8V/2.5V/3.3V/5V).
- -40°C to 85°C Operating Temperature.
- 28-pin SSOP IC package (RoHS compliant and Pb-free Green Compound).
- Pin-compatible with PL2303HXD/PL2303EA chip (SSOP28).

**Product Data Sheet**
**PL2303GE**
**REVISION HISTORY**

| Revision | Description   | Date       |
|----------|---|------------|
| 1.0.2    | <ul style="list-style-type: none"> <li>➤ Added support for COM port numbers up to 65,535.</li> <li>➤ Added the ability for manufacturers to customize product strings in multiple languages (without needing to reapply for WHQL certification or pay additional fees).</li> </ul>  | 2025/12/17 |
| 1.0.1    | <ul style="list-style-type: none"> <li>➤ Added Win11 as supported OS</li> <li>➤ Removed supported OS: Win Vista, XP, Server 2003, 2008</li> <li>➤ Removed “Windows Update Driver installation available in Windows 7 and above (32/64-bit)” in Royalty-Free Driver Support</li> <li>➤ Removed BCD information</li> <li>➤ Modified PID from 23E3 to 23A3</li> <li>➤ Modified configurable GPIO pins information</li> </ul> | 2022/1/26  |
| 1.0.0    | <ul style="list-style-type: none"> <li>➤ Formal release</li> </ul>  | 2021/3/11  |

---

**Product Data Sheet****PL2303GE**

---

**1. Product Applications**

- Single-chip upgrade solution for Legacy RS232 devices to USB interface
- USB to RS232/RS422/RS485 interface converters/cables/dongles/adapters
- MCU-based devices to USB host interface
- Point-of-Sale (POS) Terminals/Printers/Pole Displays
- USB Barcode/Smart Card Readers
- PC I/O Docking Station/Port Replicators
- Healthcare/Medical USB Interface Data Transfer Cable
- Serial-over-IP Wireless Solution
- Cellular/PDA USB Interface Data Transfer Cable
- GPS/Navigation USB Interface
- Industrial / Instrumentation / Automation Control USB Interface
- USB Modem / Wireless / Zigbee USB Interface
- Set-Top Box (STB) / Home Gateway USB Interface
- Battery Charger Detection for high-current and quick charging of batteries.


**2. Royalty-Free Driver Support**

- Windows 11, 10, 8, 7, (Microsoft Certified WHQL Drivers)
- Windows Server 2008 R2, 2012, 2016, 2019, 2022
- Windows Embedded Industry, Point-of-Service (WEPOS), and POSReady
- Windows Embedded Compact, Windows Embedded CE, Windows CE
- Mac OS X
- Linux OS 3.18 and above (Support Linux 5.5 in-box driver and above)
- Android 3.2 and above

**3. Ordering Information**

| Chip Product Name | Package Type | Ordering Part Number | MPQ            |
|-------------------|--------------|----------------------|----------------|
| PL2303GE          | 28-pin SSOP  | PL2303G4ZJG7P4       | 48pcs / tube   |
|                   |              | PL2303G4ZJG8P4       | 2000pcs / reel |

#### 4. Block Diagram

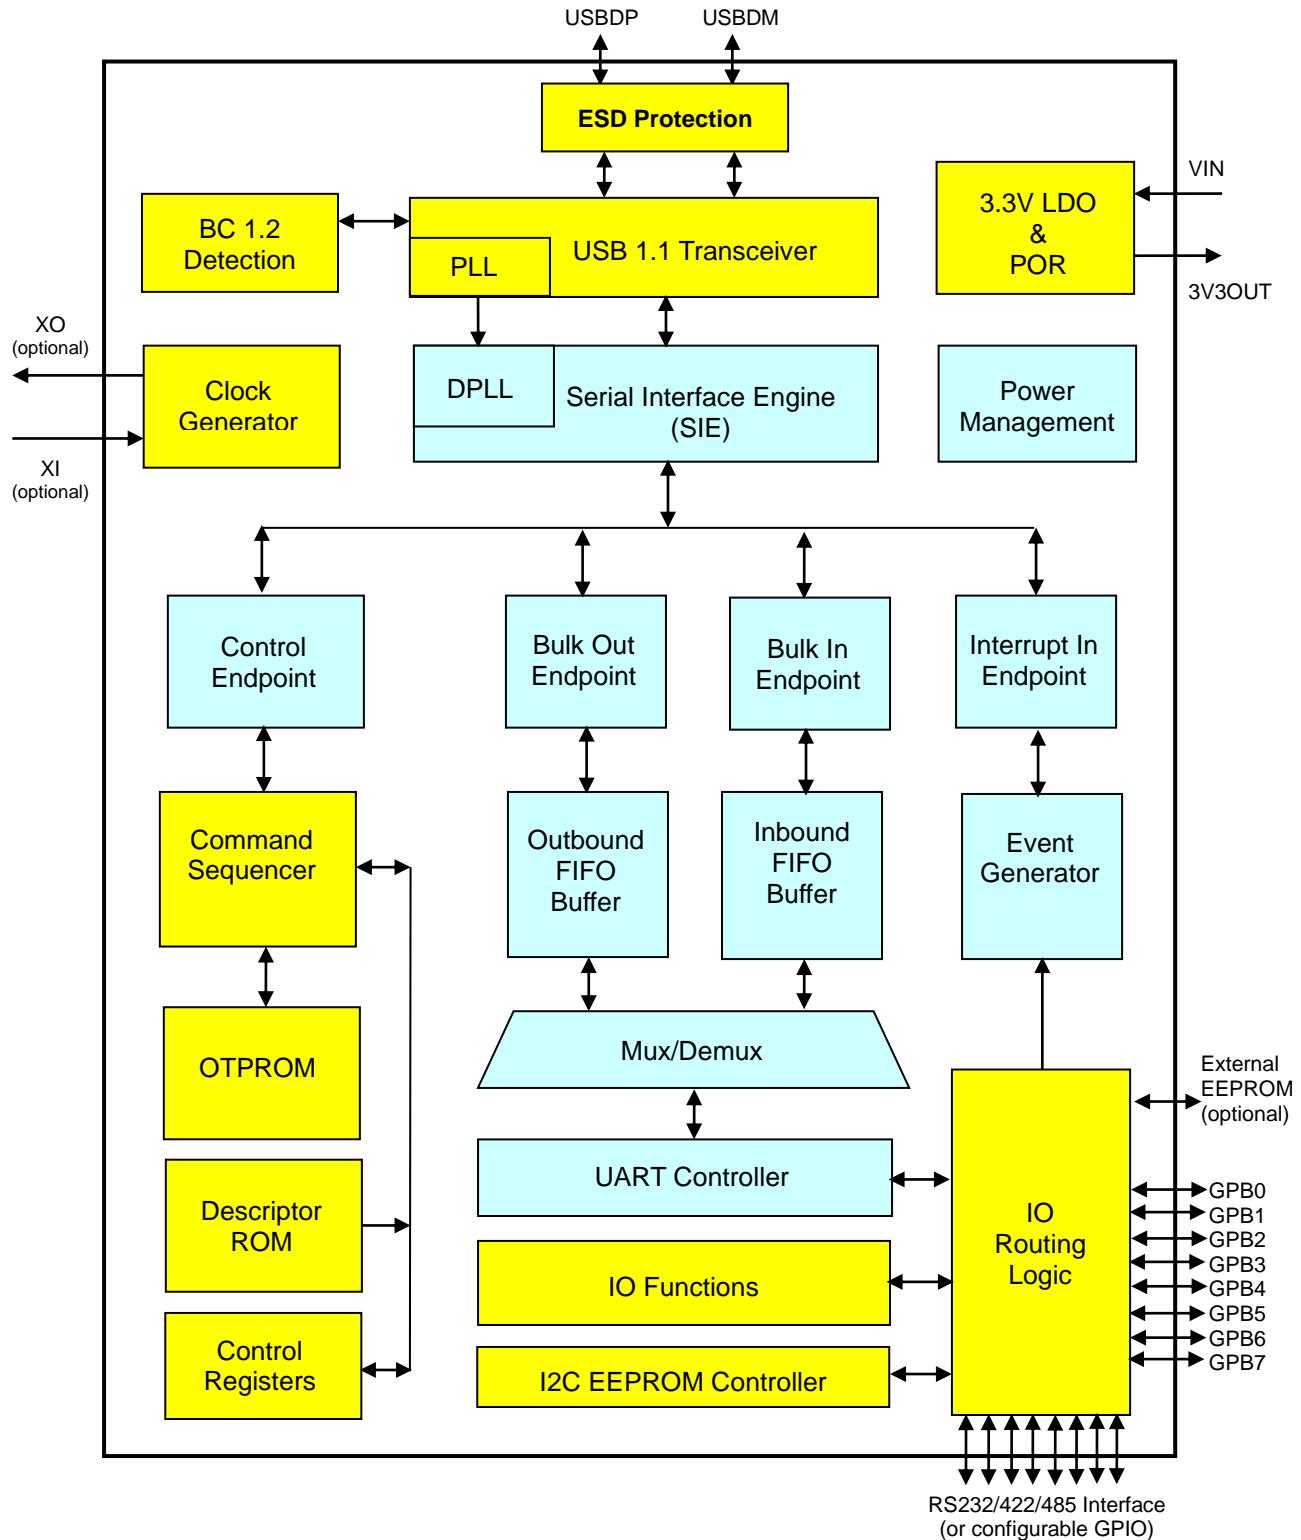

## 5. USB Logo Certification

(TBA)

## Table of Contents

|   |           |
|---|-----------|
| <b>1. Product Applications.....</b>                         | <b>4</b>  |
| <b>2. Royalty-Free Driver Support.....</b>                  | <b>4</b>  |
| <b>3. Ordering Information.....</b>                         | <b>4</b>  |
| <b>4. Block Diagram.....</b>                                | <b>5</b>  |
| <b>5. USB Logo Certification.....</b>                       | <b>6</b>  |
| <b>6. Overview.....</b>                                     | <b>12</b> |
| 6.1 PL2303 G-Series USB to Serial Family Product Table..... | 13        |
| <b>7. Pin Diagram and Description.....</b>                  | <b>15</b> |
| 7.1 SSOP28 Pin Diagram .....                                | 15        |
| 7.2 Pin Out Description.....                                | 16        |
| 7.4 GPIO Multi-Function Options.....                        | 18        |
| <b>8. Functional Description.....</b>                       | <b>20</b> |
| 8.1 ESD Protection .....                                    | 20        |
| 8.2 BC 1.2 Detection .....                                  | 20        |
| 8.3 USB 1.1 FS Transceiver .....                            | 20        |
| 8.4 LDO Regulator.....                                      | 20        |
| 8.5 Clock Generator .....                                   | 20        |
| 8.6 USB FS SIE.....   | 20        |
| 8.7 Power Management.....                                   | 21        |
| 8.8 Control Endpoint.....                                   | 21        |
| 8.9 Bulk Out Endpoint.....                                  | 21        |
| 8.10 Bulk In Endpoint .....                                 | 21        |
| 8.11 Interrupt In Endpoint.....                             | 21        |
| 8.12 Command Sequencer.....                                 | 21        |
| 8.13 Outbound FIFO.....                                     | 21        |
| 8.14 Inbound FIFO .....                                     | 22        |
| 8.15 Event Generator .....                                  | 22        |
| 8.16 Internal OTPROM.....                                   | 22        |
| 8.17 Mux/Demux .....  | 22        |
| 8.18 Descriptor ROM.....                                    | 22        |
| 8.19 UART Control .....                                     | 22        |

|  |           |
|--|-----------|
| 8.20 Control Registers.....                          | 22        |
| 8.21 IO Functions .....                              | 23        |
| 8.22 I/O Routing Logic.....                          | 23        |
| 8.23 I2C EEPROM Controller .....                     | 23        |
| <b>9. Chip Function Configuration .....</b>          | <b>24</b> |
| 9.1 USB Data Configuration .....                     | 24        |
| 9.2 UART Configuration.....                          | 28        |
| 9.3 GPIO (GPA) Configuration.....                    | 29        |
| 9.4 GPIO (GPB) Configuration.....                    | 31        |
| 9.5 Miscellaneous (MISC) Configuration.....          | 33        |
| <b>10. Design Application Examples.....</b>          | <b>34</b> |
| 10.1 USB Bus Powered Design.....                     | 34        |
| 10.2 Self Powered Design .....                       | 34        |
| 10.3 Chip Reset Control .....                        | 36        |
| 10.4 I/O Power Supply to PL2303GE .....              | 37        |
| 10.5 USB to RS232 Cable Design .....                 | 38        |
| 10.6 USB to RS485/RS422 .....                        | 39        |
| 10.7 Battery Charging Support .....                  | 40        |
| 10.8 External I2C EEPROM Support .....               | 42        |
| <b>11. DC &amp; Temperature Characteristics.....</b> | <b>43</b> |
| 11.1 Absolute Maximum Ratings .....                  | 43        |
| 11.2 DC Characteristics.....                         | 43        |
| 11.2.1 Operating Voltage and Suspend Current .....   | 43        |
| 11.2.2 I/O Pins.....                                 | 43        |
| 11.3 ESD Protection .....                            | 44        |
| 11.4 Temperature Characteristics.....                | 44        |
| 11.5 Baud Rate Characteristics .....                 | 44        |
| <b>12. Outline Diagram .....</b>                     | <b>45</b> |
| 12.1 Chip Marking information.....                   | 45        |
| 12.2 SSOP28 Package .....                            | 45        |
| <b>13. Packing Information .....</b>                 | <b>47</b> |
| 13.1 Carrier Tape (SSOP-28) .....                    | 47        |
| 13.2 Reel Dimension .....                            | 48        |

|                         |    |
|-------------------------|----|
| 13.3 Tube Packing ..... | 49 |
|-------------------------|----|

## List of Figures

|   |    |
|---|----|
| Figure 4-1 PL2303GE Block Diagram .....               | 6  |
| Figure 7-1 PL2303GE Pin Diagram (SSOP28).....         | 15 |
| Figure 10-1 USB Bus Powered Design Example .....      | 34 |
| Figure 10-2a USB Self Powered Design Example 1.....   | 35 |
| Figure 10-2b USB Self Powered Design Example 2.....   | 35 |
| Figure 10-3a Chip Reset Control Application .....     | 36 |
| Figure 10-3b Chip Power Reset Timing Diagram .....    | 36 |
| Figure 10-4a IO Power Supply .....                    | 37 |
| Figure 10-4b VDD_IO Voltage Supply.....               | 37 |
| Figure 10-5 USB to RS232 Design Example.....          | 38 |
| Figure 10-6 USB to RS485/422 Design Example .....     | 39 |
| Figure 10-7a Battery Charging Design Example #1 ..... | 40 |
| Figure 10-7b Battery Charging Design Example #2 ..... | 41 |
| Figure 10-8 External I2C EEPROM Design Example .....  | 42 |
| Figure 12-1 PL2303GE Outline Diagram (SSOP28).....    | 46 |
| Figure 13-1a SSOP28 Carrier Tape .....                | 47 |
| Figure 13-1b IC Reel Placements .....                 | 47 |
| Figure 13-2 Reel Dimension .....                      | 48 |
| Figure 13-3 Tube Packing Dimension .....              | 49 |

## List of Tables

|   |    |
|---|----|
| Table 7-1: USB Data Interface Pins .....  | 16 |
| Table 7-2: UART (Serial Port) Interface Pins.....                               | 16 |
| Table 7-3: Configurable GPIO Pins – Group A (Shared with Serial Port Pins)..... | 16 |
| Table 7-4: Configurable GPIO Pins – Group B.....                                | 17 |
| Table 7-5: Power and Ground Pins .....  | 17 |
| Table 7-6: Miscellaneous Pins .....   | 17 |
| Table 7-7: Configurable GPIO Multi-Function Pins.....                           | 18 |
| Table 7-8: GPIO Multi-Function Option Descriptions .....                        | 18 |
| Table 9-1 USB Descriptor Configuration .....                                    | 25 |
| Table 9-2 UART Startup Configuration.....                                       | 28 |
| Table 9-3 GPIO (GPA Group) Configuration .....                                  | 29 |
| Table 9-4 GPIO (GPB Group) Configuration .....                                  | 31 |
| Table 9-5 Miscellaneous Configuration .....                                     | 33 |
| Table 11-1 Absolute Maximum Ratings.....  | 43 |
| Table 11-2a Operating Voltage and Suspend Current.....                          | 43 |
| Table 11-2b I/O Pins .....  | 43 |
| Table 11-3 ESD Protection .....   | 44 |
| Table 11-4 Temperature Characteristics .....                                    | 44 |
| Table 11-5 Baud Rate Characteristics.....                                       | 44 |
| Table 12-1 Package Dimension .....  | 45 |
| Table 13-1 Reel Part Number Information.....                                    | 48 |

## 6. Overview

The new PL2303GE chip is one of the latest G-Series IC product added to the popular PL2303 USB to Serial (UART) Bridge Controller family, replacing the PL2303EA (with ESD protection) chip. It provides an advanced full-featured single-chip bridge solution for connecting a full-duplex UART asynchronous serial interface device to any Universal Serial Bus (USB) capable host. The PL2303GE provides highly compatible USB drivers to simulate the traditional COM port (via virtual COM Port) on most operating systems allowing existing serial UART applications based on legacy COM port to easily migrate and be made USB ready.

The PL2303GE provides USB port system-level ESD (electrostatic discharge) protection that eliminates the need for external ESD protection components to minimize PCB size and save BOM costs. The PL2303GE offers ESD protection on the USB port pins up to  $\pm 15\text{kV}$  Human Body Model (HBM) and is according to the IEC-61000-4-2 ESD specification.

The new PL2303GE is pin-to-pin compatible with the PL2303EA chip. It also integrates an internal precise clock generator (no external crystal required), USB 1.1 transceiver, Serial Interface Engine (SIE), LDO voltage regulator, power-on- reset (POR), FIFO data buffers, and OTPROM.

The PL2303GE added several new features and enhancements:

- Integrated termination resistors and pull-up resistor to reduce PCB external components.
- New USB drivers for different OS platforms with faster performance and advanced features.
- Precise baud rate generator (up to 12Mbps).
- OTPROM can be programmed directly through USB (no high voltage generator required).
- Larger TX/RX FIFO data buffers (1024-byte).
- Up to 16 configurable GPIO pins.
- Versatile GPIO functions and routing logic (TX/RX LED, VBUS\_DET, USB\_CFG, CLK\_OUT, etc.).
- Supports 3.3V VBUS voltage operation.
- Wide I/O voltage range (1.8V/2.5V/3.3V/5V).
- Configurable I/O pin output driving strength.
- UART inverted signal configurable option.
- Unique USB Serial Number for each IC.
- Supports Battery Charger (BC1.2) Detection to enable fast charging of batteries.

The PL2303GE is designed to support a wide-range of serial application domain including mobile, embedded, industrial, consumer, healthcare, navigation, and wearable solutions in mind. It provides a small footprint that could easily fit in to any connectors and handheld devices. With very small power consumption in either operating or suspend mode, the PL2303GE is perfect for bus powered operation with plenty of power left for the attached devices. Flexible signal level requirement on the RS232-like serial port side also allows the PL2303GE to connect directly to any 5V~1.8V range devices.

## 6.1 PL2303 G-Series USB to Serial Family Product Table

Prolific's new PL2303 G-series USB to Serial family product line offers a variety of new advanced features for USB serial interface product design. The PL2303 G-series are redesigned to provide accurate and flexible baud rate support as well as plenty of I/O functions that can be easily configured in OTPROM memory.

|   | PL2303 G-Series USB to Serial (UART) Family Product Line |                                       |   |   |                                   |   |
|---|--|---------------------------------------|---|---|-----------------------------------|---|
| Product                                     | PL2303GC   | PL2303GS                              | PL2303GE                                      | PL2303GT                                  | PL2303GL                          | PL2303GR                                  |
| <b>Description</b>                          | USB to Full UART (Integrated Clock)                      | USB to Full UART (Integrated Clock)   | <b>USB to Full UART (High ESD Protection)</b> | USB to RS232 (Internal RS232 Transceiver) | USB to Basic UART (Low-Pin Count) | USB to RS485 (Internal RS485 Transceiver) |
| <b>Packages</b>                             | SSOP28 QFN24   | SSOP16                                | <b>SSOP28</b>                                 | SSOP28                                    | SOP8                              | SSOP28                                    |
| <b>UART Interface</b>                       | RS232<br>RS422/RS485                                     | RS232<br>RS422/RS485                  | <b>RS232<br/>RS422/RS485</b>                  | RS232 Only                                | RS232 (TX-RX Only)                | RS485 Only                                |
| <b>Max. Data Rates</b>                      | 12Mbps   | 12Mbps                                | <b>12Mbps</b>                                 | 1Mbps                                     | 115200bps                         | 10Mbps                                    |
| <b>Dedicated GPIO Pins</b>                  | 7  | 0                                     | <b>7</b>                                      | 4   | 0                                 | 4   |
| <b>Shared GPIO (with UART pins)</b>         | 9  | 9                                     | <b>9</b>                                      | 0   | 2                                 | 0   |
| <b>Clocking</b>                             | Internal <sup>1</sup>                                    | Internal                              | <b>Internal<sup>1</sup></b>                   | Internal                                  | Internal                          | Internal                                  |
| <b>OTPROM<sup>2</sup></b>                   | USB Data + Configurable GPIO Function                    | USB Data + Configurable GPIO Function | <b>USB Data + Configurable GPIO Function</b>  | USB Data + Configurable GPIO Function     | USB Data                          | USB Data                                  |
| <b>External EEPROM Option</b>               | YES <sup>3</sup>   | YES <sup>3</sup>                      | <b>YES<sup>3</sup></b>                        | YES <sup>3</sup>                          | NO                                | NO  |
| <b>Android OS Support</b>                   | YES  | YES                                   | <b>YES</b>                                    | YES                                       | YES                               | YES                                       |
| <b>Configurable Data Buffer<sup>4</sup></b> | 768-byte (RX)<br>256-byte (TX)                           | 768-byte (RX)<br>256-byte (TX)        | <b>768-byte (RX)<br/>256-byte (TX)</b>        | 768-byte (RX)<br>256-byte (TX)            | 768-byte (RX)<br>256-byte (TX)    | 768-byte (RX)<br>256-byte (TX)            |
| <b>Battery Charger Detection Option</b>     | YES  | YES                                   | <b>YES</b>                                    | YES                                       | No                                | No  |
| <b>I/O Voltage Range</b>                    | I/O levels from 1.8V to 5V                               | I/O levels from 1.8V to 5V            | <b>I/O levels from 1.8V to 5V</b>             | 3.3V                                      | I/O levels from 1.8V to 5V        | 3.3V                                      |
| <b>Pin Compatible</b>                       | PL2303HxD (SSOP28 only)                                  | New design                            | <b>PL2303EA</b>                               | PL2303RA                                  | PL2303SA (SOP8 only)              | New design                                |

<sup>1</sup> – Also supports external crystal clock source to bypass internal clock.

- <sup>2</sup> – OTPROM allows setting the USB data descriptors. Also allows setting of multi-function GPIO options.
- <sup>3</sup> – External EEPROM (when enabled in OTPROM) will override OTPROM settings.
- <sup>4</sup> – TX/RX data buffers are configurable in OTPROM (PL2303GC, PL2303GS, and PL2303GE); or by driver customization.

## 7. Pin Diagram and Description

### 7.1 SSOP28 Pin Diagram

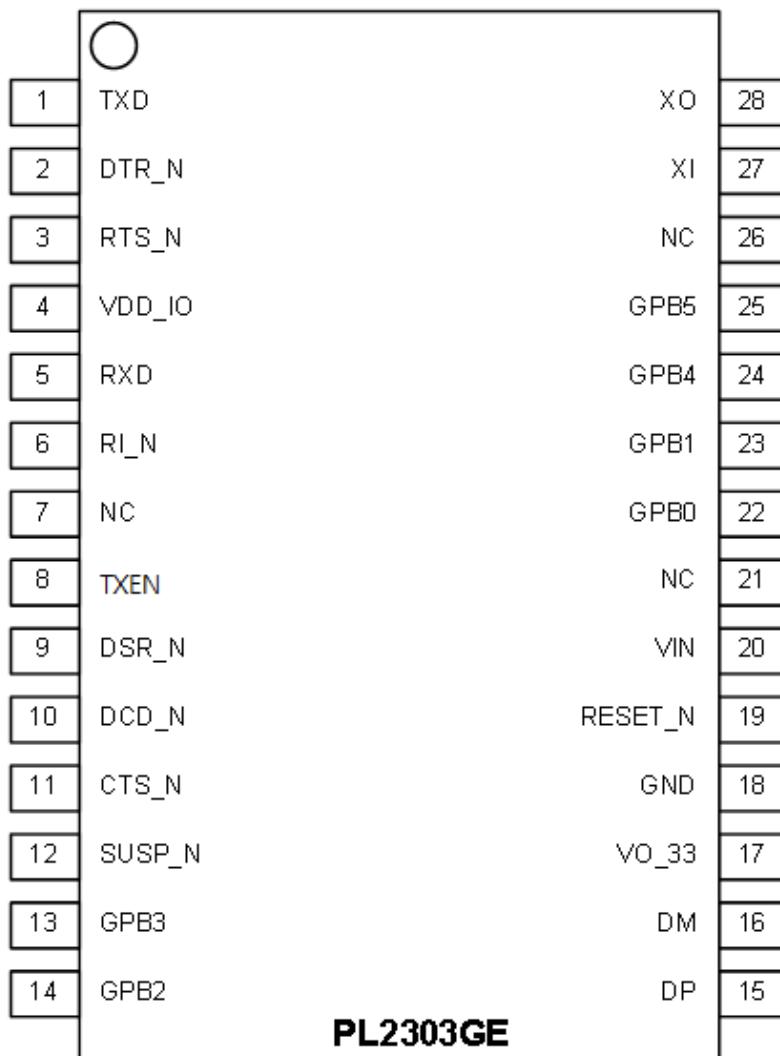


Figure 7-1 PL2303GE Pin Diagram (SSOP28)

## 7.2 Pin Out Description

Table 7-1: USB Data Interface Pins

| Pin Name | SSOP28 Pin No. | Type | Description                     |
|----------|----------------|------|---------------------------------|
| DP       | 15             | I/O  | USB Port Data Plus (D+) Signal  |
| DM       | 16             | I/O  | USB Port Data Minus (D-) Signal |

Table 7-2: UART (Serial Port) Interface Pins

| Pin Name | SSOP28 Pin No. | Type   | Description   |
|----------|----------------|--------|---|
| TXD      | 1              | Output | Serial Port: Transmitted Data Output                      |
| DTR_N    | 2              | Output | Serial Port: Data Terminal Ready Control Output           |
| RTS_N    | 3              | Output | Serial Port: Request To Send Control Output               |
| RXD      | 5              | Input  | Serial Port: Received Data Input                          |
| RI_N     | 6              | Input  | Serial Port: Ring Indicator (Remote Wakeup) Control Input |
| DSR_N    | 9              | Input  | Serial Port: Data Set Ready Control Input                 |
| DCD_N    | 10             | Input  | Serial Port: Data Carrier Detect Control Input            |
| CTS_N    | 11             | Input  | Serial Port: Clear To Send Control Input                  |

Table 7-3: Configurable GPIO Pins – Group A (Shared with Serial Port Pins)

| Pin Name | SSOP28 Pin No. | Type | Description   |
|----------|----------------|------|---|
| GPA0     | 1              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is TXD serial port output pin.</b>   |
| GPA1     | 5              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is RXD serial port input pin.</b>    |
| GPA2     | 3              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is RTS_N serial port output pin.</b> |
| GPA3     | 11             | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is CTS_N serial port input pin.</b>  |
| GPA4     | 2              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is DTR_N serial port output pin.</b> |
| GPA5     | 9              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is DSR_N serial port input pin.</b>  |
| GPA6     | 10             | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is DCD_N serial port input pin.</b>  |
| GPA7     | 6              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is RI_N serial port input pin.</b>   |

Table 7-4: Configurable GPIO Pins – Group B

| Pin Name | SSOP28 Pin No. | Type | Description  |
|----------|----------------|------|--|
| GPB0     | 22             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB1     | 23             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB2     | 14             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB3     | 13             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB4     | 24             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB5     | 25             | I/O  | Configurable GPIO Pin. (see Section 7.4)   |
| GPB6     | 12             | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is SUSP_N output pin.</b> |
| GPB7     | 8              | I/O  | Configurable GPIO Pin. (see Section 7.4)<br><b>Factory default is TXEN output pin.</b>   |

Table 7-5: Power and Ground Pins

| Pin Name | SSOP28 Pin No. | Type  | Description  |
|----------|----------------|-------|--|
| VDD_IO   | 4              | Power | +1.8V to +5V I/O signal power input pin.   |
| VO_33    | 17             | Power | +3.3V output power from integrated LDO regulator. For self-powered design, supply +3.3V to this pin. |
| GND      | 18             | Power | Ground   |
| VIN      | 20             | Power | USB port VBUS input power supply.<br>For self-powered design, supply +3.3V to this pin.              |

Table 7-6: Miscellaneous Pins

| Pin Name | SSOP28 Pin No. | Type   | Description   |
|----------|----------------|--------|---|
| SUSP_N   | 12             | Output | Active low Shutdown control pin. Can be used to shutdown external RS232 transceiver.  |
| RESET_N  | 19             | Input  | Active low Reset pin. Can be used by external device to reset the PL2303GC.<br>NOTE: This pin has internal pull-high. It can be pull up to VIN or VDD_IO. |
| XI       | 27             | Input  | Optional. 12MHz crystal oscillator input.<br>If not used, leave pin floating.   |
| XO       | 28             | Output | Optional. 12MHz crystal oscillator output.<br>If not used, leave pin floating.  |
| NC       | 7, 21, 26      | NC     | No internal connection. Leave floating.   |

## 7.4 GPIO Multi-Function Options

The PL2303GE chip provides a total of 16 configurable GPIO (General Purpose I/O) pins. The pins are grouped into GPA and GPB set of pins. The table below shows the possible functions that can be configured for each GPIO pin. These special functions can be easily configured in the OTPROM of the PL2303GE or to an external I2C EEPROM using the Prolific OTPROM/EEPROM software tool. When these pins are configured as standard GPIO pins, customers can refer to the Prolific GPIO SDK (software development kit) to develop software to control the GPIO pins for customer application desired functions.

**Table 7-7: Configurable GPIO Multi-Function Pins**

| GPIO        | SSOP28 Pin No. | Factory Default | Configurable Options (using OTPROM Tool) |           |           |            |            |        |
|-------------|----------------|-----------------|--|-----------|-----------|------------|------------|--------|
| <b>GPA0</b> | 1              | TXD             | GPIO Input                               |           |           |            |            |        |
| <b>GPA1</b> | 5              | RXD             | GPIO Input                               |           |           |            |            |        |
| <b>GPA2</b> | 3              | RTS             | TX_LED                                   | CLK_OUT   | SUSP_N    | USB_CFG    | GPIO Input | TXEN   |
| <b>GPA3</b> | 11             | CTS             | RX_LED                                   | TRX_LED   | WAKEUP    | VBUS_DET   | GPIO Input | BC_DET |
| <b>GPA4</b> | 2              | DTR             | TX_LED                                   | CLK_OUT   | USB_CFG   | EE_SDA     | GPIO Input |        |
| <b>GPA5</b> | 9              | DSR             | RX_LED                                   | TRX_LED   | BC_SUSP_N | EE_SCL     | GPIO Input |        |
| <b>GPA6</b> | 10             | DCD             | VBUS_DET                                 | BC_DET    | TXEN      | GPIO Input |            |        |
| <b>GPA7</b> | 6              | RI (WAKEUP)     | GPIO Input                               |           |           |            |            |        |
| <b>GPB0</b> | 22             | GPIO Input      | TX_LED                                   | CLK_OUT   |           |            |            |        |
| <b>GPB1</b> | 23             | GPIO Input      | RX_LED                                   | TRX_LED   |           |            |            |        |
| <b>GPB2</b> | 14             | GPIO Input      | VBUS_DET                                 | EE_SDA    |           |            |            |        |
| <b>GPB3</b> | 13             | GPIO Input      | USB_CFG                                  | EE_SCL    |           |            |            |        |
| <b>GPB4</b> | 24             | GPIO Input      | CLK_OUT                                  | BC_SUSP_N |           |            |            |        |
| <b>GPB5</b> | 25             | GPIO Input      | BC_DET                                   |           |           |            |            |        |
| <b>GPB6</b> | 12             | SUSP_N          | USB_CFG                                  | WAKEUP    | CLK_OUT   | GPIO Input |            |        |
| <b>GPB7</b> | 8              | TXEN            | GPIO Input                               |           |           |            |            |        |

**Table 7-8: GPIO Multi-Function Option Descriptions**

| GPIO Function | SSOP28 GPIO Pins                               | Type   | Description                  |
|---------------|--|--------|------------------------------|
| <b>TX_LED</b> | GPA2 (Pin 3)<br>GPA4 (Pin 2)<br>GPB0 (Pin 22)  | Output | Serial Port: TXD Access LED. |
| <b>RX_LED</b> | GPA3 (Pin 11)<br>GPA5 (Pin 9)<br>GPB1 (Pin 23) | Output | Serial Port: RXD Access LED. |

|                  |   |                  |  |
|------------------|---|------------------|--|
| <b>TRX_LED</b>   | GPA3 (Pin 11)<br>GPA5 (Pin 9)<br>GPB1 (Pin 23)                                  | Output           | Serial Port: TXD and RXD Access LED.   |
| <b>VBUS_DET</b>  | GPA3 (Pin 11)<br>GPA6 (Pin 10)<br>GPB2 (Pin 14)<br>GPB7 (Pin 8)                 | Input            | When this pin is set to VBUS_DET mode, the device will not attach to USB until VBUS_DET input pin goes to high level. There must be only one pin configured as VBUS_DET pin.   |
| <b>USB_CFG</b>   | GPA2 (Pin 3)<br>GPA4 (Pin 2)<br>GPB3 (Pin 13)<br>GPB6 (Pin 12)                  | Output           | When device is attached to USB port and configured by USB host, this USB_CFG pin will output to high level. This pin can be used to enable system function after USB is configured.  |
| <b>TXEN</b>      | GPA2 (Pin 3)<br>GPA6 (Pin 10)<br>GPB7 (Pin 8)                                   | Output           | Transmit Data Enable Pin can be used to enable RS485/RS422 transceiver when data is being transmitted.   |
| <b>SUSP_N</b>    | GPA2 (Pin 3)<br>GPB6 (Pin 12)   | Output           | Active low Shutdown control pin. This pin has two options to choose. One is to indicate chip suspend state by USB bus state. The other option (factory default) is to indicate chip un-configured state and chip suspend state. These two options can be configured in OTPROM or EEPROM. |
| <b>WAKEUP</b>    | GPA3 (Pin 11)<br>GPA7 (Pin 6)<br>GPB6 (Pin 12)                                  | Input            | The remote wakeup function is to wake up chip from suspended state when this pin toggle in suspend state. There must be only one pin configured as WAKEUP pin. The factory default is RI (GPA7) pin.   |
| <b>BC_DET</b>    | GPA3 (Pin 11)<br>GPA6 (Pin 10)<br>GPB5 (Pin 25)                                 | Output           | Battery Charge Detect pin. This active high pin indicates BC 1.2 DCP/CDP is detected.  |
| <b>BC_SUSP_N</b> | GPA5 (Pin 9)<br>GPB4 (Pin 24)   | Output           | This pin has same function as SUSP_N except this pin will be forced inactive in chip suspend state when BC 1.2 DCP/CDP is detected.  |
| <b>CLK_OUT</b>   | GPA2 (Pin 3)<br>GPA4 (Pin 2)<br>GPB0 (Pin 22)<br>GPB4 (Pin 24)<br>GPB6 (Pin 12) | Output           | This pin can generate clock output up to 12MHz. Clock rates can be configured in OTPROM/EEPROM or customized driver.   |
| <b>EE_SDA</b>    | GPA4 (Pin 2)<br>GPB2 (Pin 14)   | Input/<br>Output | External I2C EEPROM interface serial data signal.  |
| <b>EE_SCL</b>    | GPA5 (Pin 9)<br>GPB3 (Pin 13)   | Input/<br>Output | External I2C EEPROM interface serial clock signal.   |

## 8. Functional Description

This section details the functional block diagram description of the PL2303GE.

### 8.1 ESD Protection

The PL2303GE provides USB port system-level ESD (electrostatic discharge) protection that eliminates the need for external ESD protection components to minimize PCB size and save BOM costs. The PL2303GE offers ESD protection on the USB port pins up to  $\pm 15\text{kV}$  Human Body Model (HBM) and is according to the IEC-61000-4-2 ESD specification.

### 8.2 BC 1.2 Detection

This function is used to detect VBUS power supply capability of USB host port and provides charging control to battery charging IC. This function is enabled in OTPROM by setting GPIO pin to BC\_DET option. This pin will indicate if BC 1.2 DCP/CDP is detected when device is attached to the USB port. The external battery charging IC uses the USB\_CFG and SUSP\_N signal pins to control its charging current support or the BC\_DET signal pin to enable fast charging current mode.

### 8.3 USB 1.1 FS Transceiver

The USB Transceiver provides the USB full-speed electrical signal requirements and USB physical interface (DP/DM). This block also includes one precise internal oscillator for PLL. The PLL provides the clock to other logic functions. This block also includes the internal USB series termination resistors on the USB data lines and pull-up resistor for the DP signal.

### 8.4 LDO Regulator

This block is the 5V to 3.3V LDO regulator to power and drive the USB transceiver. It also includes 3.3V brownout detection output signals that will be used by digital circuit to reset the chip.

### 8.5 Clock Generator

The clock generator module generates the 48MHz and 12MHz reference clock signals for internal chip logic. The internal clocks will be stopped while in suspend state.

### 8.6 USB FS SIE

The USB Full-Speed Serial Interface Engine (SIE) block performs the processing of USB DP/DM signals. It translates the internal parallel data to serial data and outputs to USB FS transceiver to generate external USB DP/DM signals timing. It also translates external USB DP/DM signals pass through USB FS transceiver to parallel data for internal circuit. This block supports USB packet decoding and encoding. It also generates and check packet

CRC, bit stuffing, SYNC and EOP frame signal. The DPLL module will use the internal 48MHz clock to synchronize external DP/DM transitions to generate 12MHz clock for USB interface related circuit.

## 8.7 Power Management

This module will monitor the USB attachment and DP/DM signals state to create reset state, running state, suspend state, wakeup state, etc.

## 8.8 Control Endpoint

The Control Endpoint module handles control endpoint packet transfer protocols such as SETUP packet, DATA packet and return status packet.

## 8.9 Bulk Out Endpoint

The Bulk Out Endpoint module handles bulk-out endpoint packet transfer protocols such as DATA packet and return status packet. It also transfers USB host bulk-out data to chip outbound FIFO.

## 8.10 Bulk In Endpoint

The Bulk In Endpoint module handles bulk-in endpoint packet transfer protocols such as DATA packet and return status packet. It also transfers data inside the chip inbound FIFO to USB host through bulk-in DATA packet.

## 8.11 Interrupt In Endpoint

The Interrupt In Endpoint module handles interrupt-in endpoint packet transfer protocols such as DATA packet and return status packet. It transfers interrupt data generated inside the chip to USB host through interrupt-in DATA packet.

## 8.12 Command Sequencer

This module handles the USB standard requests and vendor requests. It dispatches control signals to relative peripheral modules and gather information from peripheral modules. When it received USB standard request commands, it may check ROM data or data latched from OTP and return them to USB host. When vendor requests are received, it dispatches to peripherals to set or get something.

## 8.13 Outbound FIFO

This buffer receives data from Bulk Out Endpoint and provides data to peripheral modules. It handles read and write pointers and calculate full and empty conditions. There are also near empty threshold check to notify peripheral module that FIFO is going to empty.

## 8.14 Inbound FIFO

This buffer receives data from peripheral modules and provides data to Bulk In Endpoint. It handles read and write pointers and calculate full and empty conditions. There are also near full threshold check to notify peripheral module that FIFO is going to full.

## 8.15 Event Generator

This module provides interrupt data to Interrupt In Endpoint. This module senses interrupt event toggle from UART peripheral and GPIO module.

## 8.16 Internal OTPROM

The OTPROM (One-Time Programming Read-Only Memory) is used to store chip function settings, GPIO pin function setting and USB descriptor related data. A one-time programming user area of the memory is available to allow customization of settings. The user area of the PL2303GE OTPROM can now be easily programmed using the Prolific OTPROM software through USB port without any additional voltage converter requirement. Refer to Section 9.0 for more information on the OTPROM configuration settings.

## 8.17 Mux/Demux

This module is designed to pass data between FIFO and UART peripheral module.

## 8.18 Descriptor ROM

This block contains the USB descriptor data for returning to USB host.

## 8.19 UART Control

The UART Control module handles the data transfer according to RS232 format and interface. Full set flow control is implemented including RTS/CTS, DTR/DSR and software flow control. Flow control circuit will check FIFO near full or near empty status to activate flow control signals. This module includes a precise baud rate generator that can generate baud rates up to 12Mbps. The baud rate is set from USB command.

## 8.20 Control Registers

The Control Registers module contains the chip control registers read and set, and initially loads from OTPROM. USB host will use USB vendor command to read and write control registers to set chip function.

## 8.21 IO Functions

The IO Functions block implements generic GPIO function and many configurable I/O functions such as TX access LED and RX access LED features, clock output features, and others (see Section 6.4).

## 8.22 I/O Routing Logic

The PL2303GE has many versatile I/O functions. Each GPIO pin is provided with multiple functions that can be configured in the OTPROM. This module multiplexes I/O functions to different chip I/O pins. It also handles I/O pin polarity, open-drain, pull-up/pull-down, and I/O pin drive capability functions.

## 8.23 I2C EEPROM Controller

The I2C EEPROM Controller provides an optional alternative solution to the OTPROM that allows an external I2C EEPROM to be attached through GPIO pins 2 and 9 (GPA4/GPA5); or pins 14 and 13 (GPB2/GPB3) for the SDA and SCL interface. Using the PL2303G OTPROM/EEPROM Writer program, customer can also write the chip function settings, GPIO pin function settings, and USB descriptor related data to external I2C EEPROM. The advantage of using an external EEPROM is that it can be written several times. The Prolific OTPROM/EEPROM software works by plugging the device through USB port without any additional voltage converter requirement. Refer to Section 9.0 for more information on the OTPROM/EEPROM configuration settings.

## 9. Chip Function Configuration

The default configuration descriptors are stored in the chip internal memory which will be loaded during power-on reset or USB bus reset whenever OTPROM is empty. Several of the USB and configuration descriptors could be modified and programmed one-time into the chip's OTPROM using the PL2303GE OTPROM/EEPROM Writer utility program. These descriptors include Vendor ID, Product ID, Serial Number, Product String, UART settings, GPIO configurations, and other configuration descriptors. The PL2303GE chip also provides an option to use an external I2C EEPROM to write the configurations several times.

### 9.1 USB Data Configuration

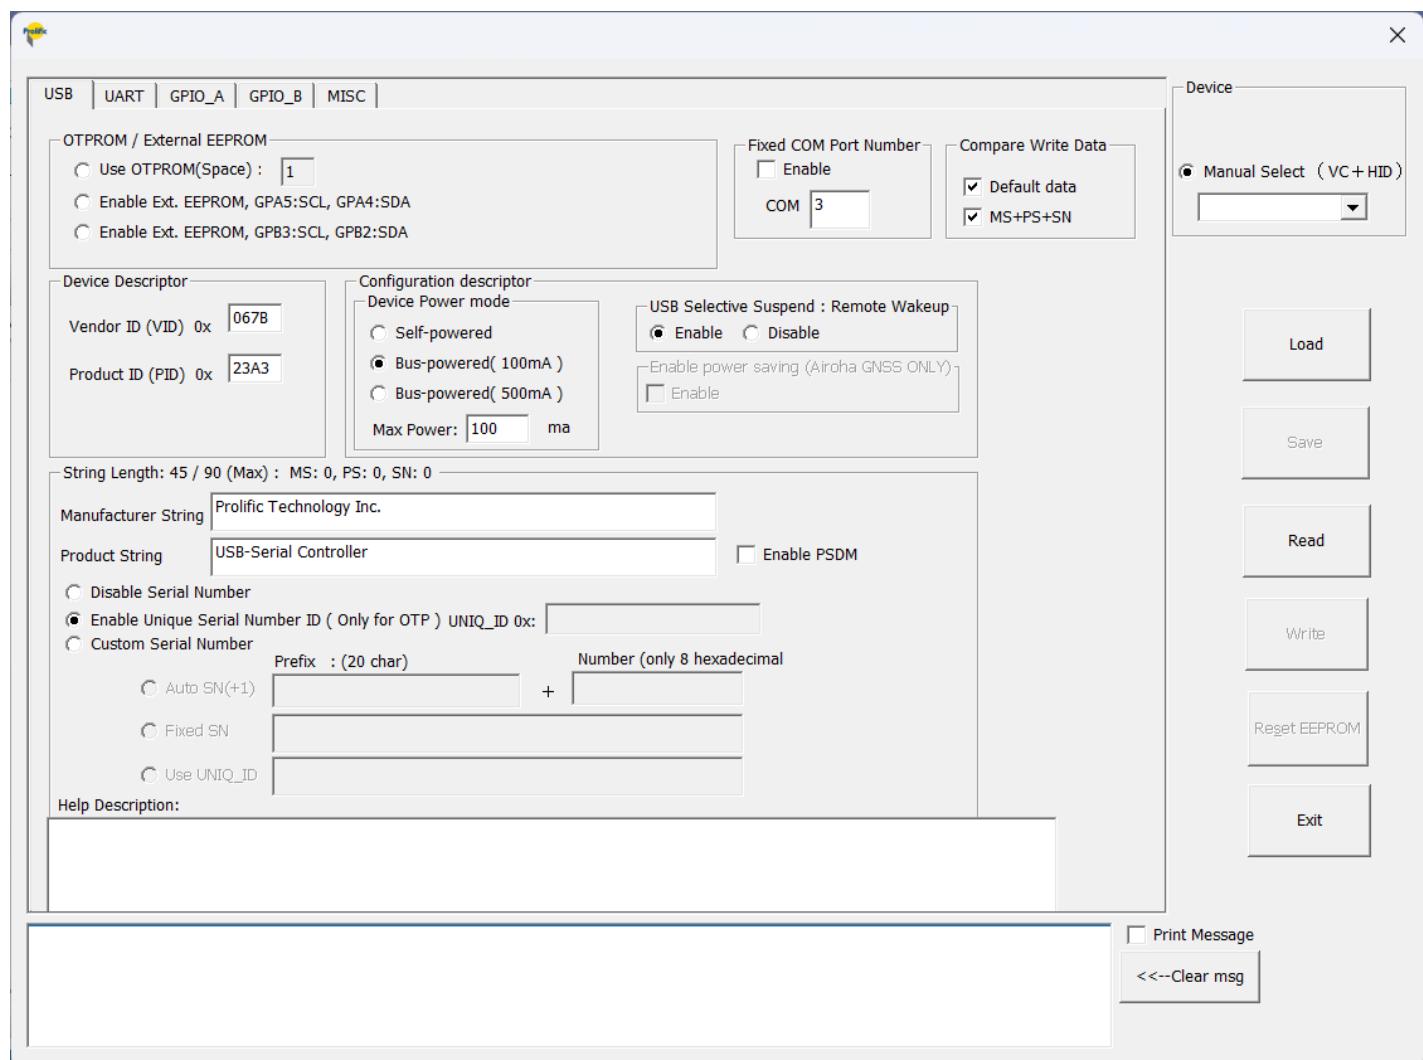


Table 9-1 USB Descriptor Configuration

| Descriptors                            | Default Value                  | Description   |
|--|--------------------------------|---|
| <b>OTPROM / External EEPROM</b>        | Use OTPROM                     | <p>This field allows writing the chip configuration settings either into the OTPROM or to an external EEPROM.</p> <ul style="list-style-type: none"> <li>• Use OTPROM – this option will write the new settings into the chip's OTPROM. The OTPROM can only be written once. If the Space box denotes a 1, it means it can be written.</li> <li>• Enable Ext. EEPROM (GPA5:SCL, GPA4:SDA) – this option can be used if there is an external I2C EEPROM attached to pins GPA5 and GPA4 of PL2303GE. Settings will be written to the external EEPROM and can be written several times.</li> <li>• Enable Ext. EEPROM (GPB3:SCL, GPB2:SDA) – this option can be used if there is an external I2C EEPROM attached to pins GPB3 and GPB2 of PL2303GE. Settings will be written to the external EEPROM and can be written several times.</li> </ul> <p><b>NOTE: PL2303GE chip can only allow a one-time switch from OTPROM to Ext EEPROM or vice-versa.</b></p> |
| <b>Vendor ID (VID)</b>                 | 067B (hex)                     | <p>USB unique Vendor ID of Company or Manufacturer. This ID is applied and registered from USB-IF.</p> <p>Refer to this website for applying VID:<br/><a href="http://www.usb.org/developers/vendor/">http://www.usb.org/developers/vendor/</a></p>   |
| <b>Product ID (PID)</b>                | 23A3 (hex)                     | USB Product ID assigned by Manufacturer.  |
| <b>Device Power Mode</b>               | Bus Powered (100mA)            | This field sets the USB device if bus-powered or self-powered device.   |
| <b>Max Power</b>                       | 100mA                          | This field sets the USB device maximum power that can be drawn by the device from the USB host. Enter the value here if it is not 100mA or 500mA. Expressed in 2 mA units (i.e., 50 = 100 mA).  |
| <b>USB Selective Suspend</b>           | Enable                         | This field enables/disables the USB Selective Suspend function. When enabled, Windows OS will suspend the device when idle for few seconds (COM port not open).   |
| <b>Manufacturer String<sup>1</sup></b> | Prolific Technology Inc.       | This field contains the product manufacturer string.  |
| <b>Serial Number<sup>1</sup></b>       | Enable Unique Serial Number ID | <ul style="list-style-type: none"> <li>• Disable Serial Number – this option will disable the Serial Number. Operating System will assign a random serial number for the device.</li> <li>• Enable Unique Serial Number ID – this default option enables the unique serial number pre-programmed inside the chip.</li> <li>• Custom Serial Number – this option allows the customer to set own product serial numbering: <ul style="list-style-type: none"> <li>○ Auto SN: allows to add prefix while the numbers auto increment after each write.</li> </ul> </li> </ul>   |


|                                     |                       |   |
|-------------------------------------|-----------------------|---|
|                                     |                       | <ul style="list-style-type: none"> <li>○ Fixed SN: this will write the same number.</li> </ul> <p>Device with serial number enabled allows the device to be assigned with the same COM port number even when plug to other USB ports of the same PC.</p>                                    |
| <b>Product String<sup>1,2</sup></b> | USB-Serial Controller | <p>When enter wordings(multiple language) in the "Product String" field and check the "Enable PSDM" of OTP tool, the device manager will show the "Product String" entered.</p>   |
| <b>Com Port Number<sup>2</sup></b>  | Disable               | <p>Expand COM port number range: from 1~255 to 1~65,535.</p> <ul style="list-style-type: none"> <li>When enter the desired COM port number in the "Fixed COM port Number" field and check the "Enable" of OTP tool, the device manager will display the COM port number entered.</li> </ul> |

NOTE<sup>1</sup>: The total string length for the manufacturer + serial number + product string is up to 90 characters.


NOTE<sup>2</sup> : How to bind a specific COM port number (1-65,535) and device name(multiple language) via OTP/EEPROM.

|   |  |   |
|---|--|---|
| String Length: 72 ( MS: 24, PS: 48, SN: 0 ) / 90      |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | 旺玖PL2303G系列，連接埠號碼支援至6萬5千5百3十五。                                 | <input checked="" type="checkbox"/> Enable PSDM |
| String Length: 81 / 90 (Max) : MS: 24, PS: 47, SN: 10 |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | 旺玖PL2303G系列，串口支持至六万五千五百三十五。                                    | <input checked="" type="checkbox"/> Enable PSDM |
| String Length: 88 ( MS: 24, PS: 53, SN: 11 ) / 90     |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | PL2303G는 COM 포트 번호를 최대 65,535까지 지원합니다.                         | <input checked="" type="checkbox"/> Enable PSDM |
| String Length: 87 / 90 (Max) : MS: 24, PS: 59, SN: 4  |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | PL2303G は COM ポート番号を最大 65,535 までサポートします。                       | <input checked="" type="checkbox"/> Enable PSDM |
| String Length: 82 ( MS: 24, PS: 47, SN: 11 ) / 90     |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | PL2303G supports COM port numbers up to 65,535.                | <input checked="" type="checkbox"/> Enable PSDM |
| String Length: 87 ( MS: 24, PS: 62, SN: 1 ) / 90      |  | Fixed COM Port Number                           |
| Manufacturer String                                   | Prolific Technology Inc.                                       | <input checked="" type="checkbox"/> Enable      |
| Product String  | La serie PL2303G admite números de puerto COM de hasta 65,535. | <input checked="" type="checkbox"/> Enable PSDM |


Windows Device Manager displays product names in multiple languages.

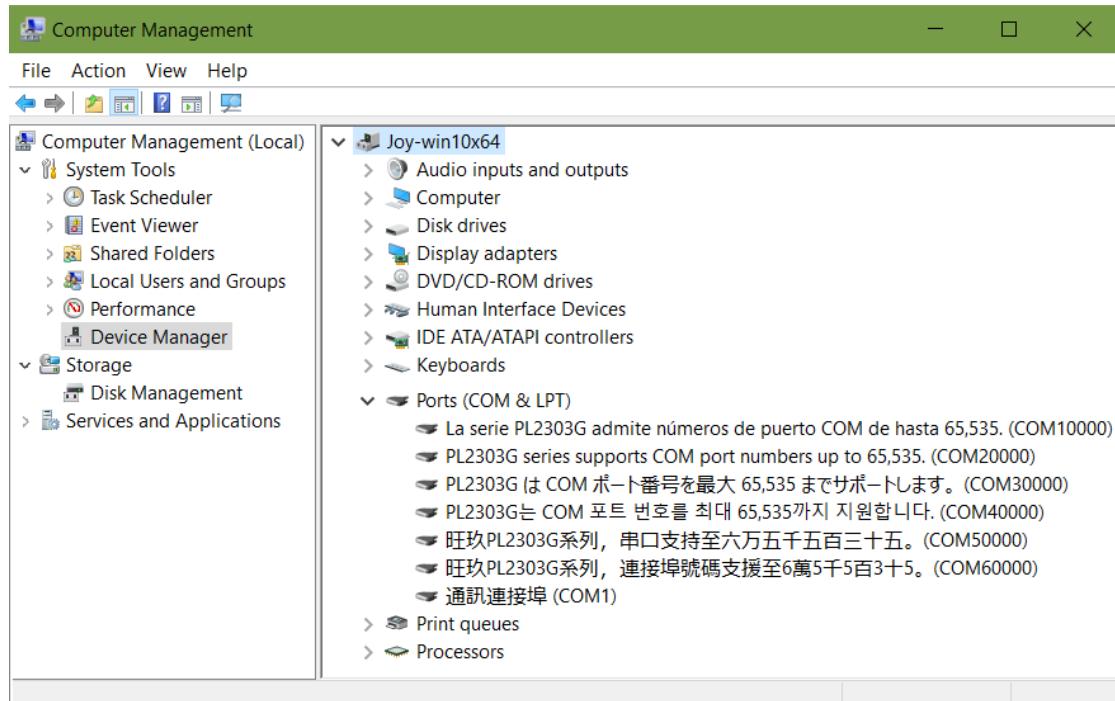

The HyperTerminal program can connect to high-numbered COM ports. ( ex: COM60000 )

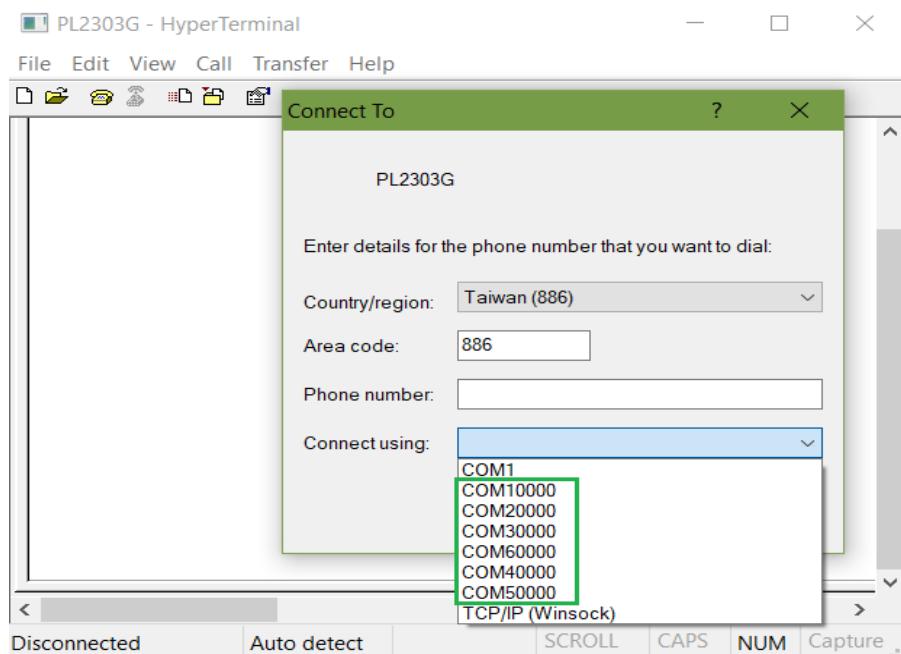

## 9.2 UART Configuration

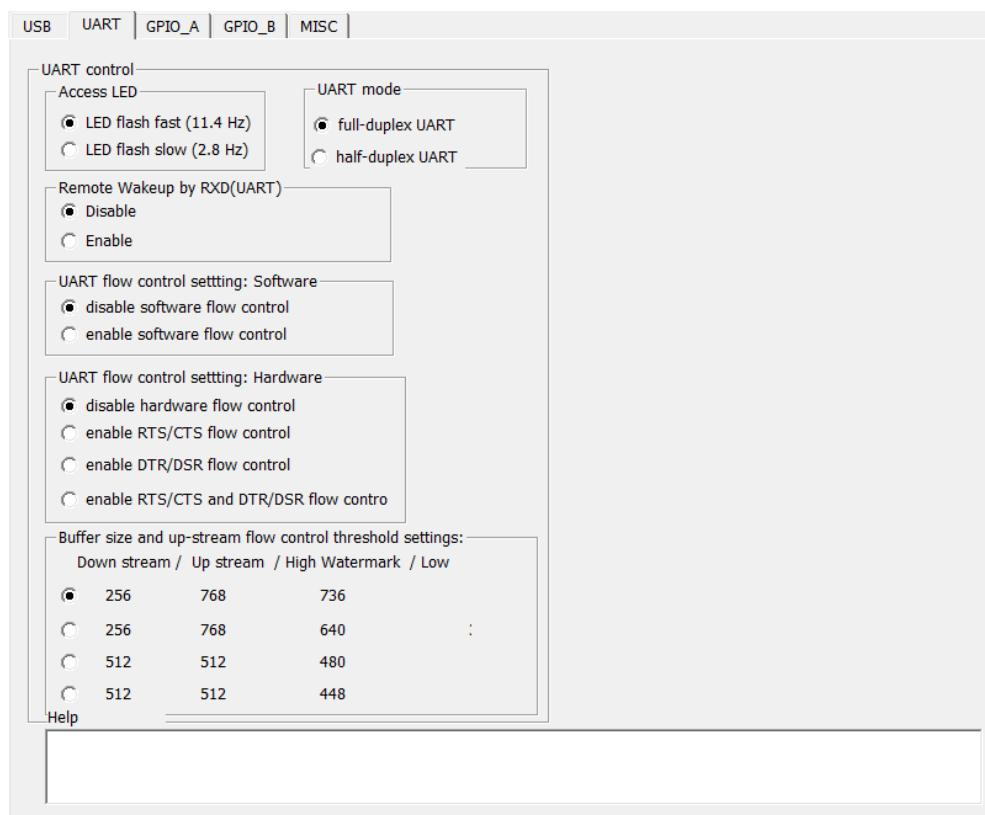

**Table 9-2 UART Startup Configuration**

| Functions                        | Default Value                          | Description   |
|----------------------------------|--|---|
| <b>LED Flash</b>                 | Fast                                   | This option sets the flashing speed of the access LED when configured using the TX_LED, RX_LED, TRX_LED GPIO pins. Fast 11.4Hz and slow 2.8Hz.  |
| <b>UART Mode</b>                 | Full-duplex UART                       | <ul style="list-style-type: none"> <li>Full-Duplex UART - this default setting allows simultaneous transmission of TX and RX lines.</li> <li>Half-Duplex UART - this option only allows for one-way transmission at a time. When there is no data transmission, TXD will be tri-state.</li> </ul> |
| <b>Remote Wakeup (RXD)</b>       | Disable                                | This allows using the RXD pin as remote wakeup. The received data from RXD may be wrong while chip is waking up.  |
| <b>Software Flow Control</b>     | Disable                                | This option allows setting the software flow control (Xon/Xoff) during chip initial startup. In general, this option need not be enabled because driver or software can control this option.  |
| <b>Hardware Flow Control</b>     | Disable                                | This option allows setting the hardware flow control (RTS/CTS, DTR/DSR, Both) during chip initial startup. In general, this option need not be enabled because driver or software can control this option.  |
| <b>Buffer Size Configuration</b> | 256(TX) - 768(RX)<br>736(HW) - 384(LW) | This sets the internal buffer size configuration for TX (downstream) and RX (upstream) as well as the high and low watermark threshold levels.  |

### 9.3 GPIO (GPA) Configuration

Also refer to Section 7.4 for the complete GPIO Multi-Function options description.

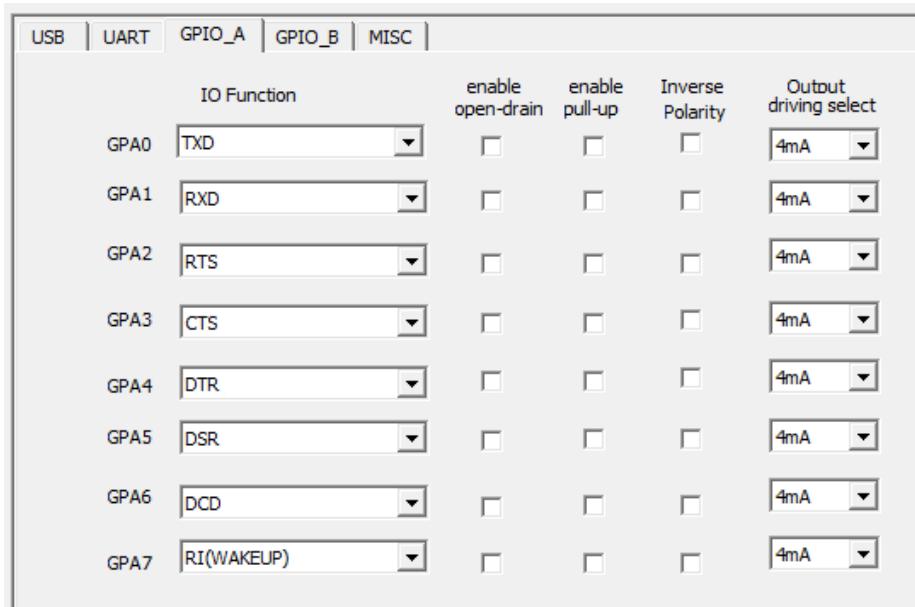


Table 9-3 GPIO (GPA Group) Configuration

| GPIO Function | Default Value | Default I/O | Description   |
|---------------|---------------|-------------|---|
| GPA0          | TXD           | Output      | <p>This field also allows setting the pin as a standard GPIO.</p> <ul style="list-style-type: none"> <li>TXD (default)</li> <li>GPIO (General Purpose I/O)</li> </ul>   |
| GPA1          | RXD           | Input       | <p>This field also allows setting the pin as a standard GPIO.</p> <ul style="list-style-type: none"> <li>RXD (default)</li> <li>GPIO (General Purpose I/O)</li> </ul>   |
| GPA2          | RTS           | Output      | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>RTS (default)</li> <li>TX_LED</li> <li>CLK_OUT (also refer to MISC folder)</li> <li>SUSP_N (also refer to MISC folder)</li> <li>USB_CFG</li> <li>TXEN</li> <li>GPIO (General Purpose I/O)</li> </ul> |
| GPA3          | CTS           | Input       | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>CTS (default)</li> <li>RX_LED</li> <li>TRX_LED</li> <li>WAKEUP</li> </ul>  |

|                         |             |        |   |
|-------------------------|-------------|--------|---|
|                         |             |        | <ul style="list-style-type: none"> <li>• VBUS_DET (also refer to MISC folder)</li> <li>• BC_DET</li> <li>• GPIO (General Purpose I/O)</li> </ul>  |
| GPA4                    | DTR         | Output | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• DTR (default)</li> <li>• TX_LED</li> <li>• CLK_OUT (also refer to MISC folder)</li> <li>• USB_CFG</li> <li>• EE_SDA</li> <li>• GPIO (General Purpose I/O)</li> </ul> |
| GPA5                    | DSR         | Input  | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• DSR (default)</li> <li>• RX_LED</li> <li>• TRX_LED</li> <li>• BC_SUSP_N</li> <li>• EE_SCL</li> <li>• GPIO (General Purpose I/O)</li> </ul>                           |
| GPA6                    | DCD         | Input  | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• DCD (default)</li> <li>• VBUS_DET (also refer to MISC folder)</li> <li>• BC_DET</li> <li>• TXEN</li> <li>• GPIO (General Purpose I/O)</li> </ul>                     |
| GPA7                    | RI (Wakeup) | Input  | <p>This field also allows setting the pin as a standard GPIO.</p> <ul style="list-style-type: none"> <li>• RI (default)</li> <li>• GPIO (General Purpose I/O)</li> </ul>  |
| Enable Open-Drain       | Disabled    |        | <p>This field sets the selected I/O pin to open-drain output mode.</p>  |
| Enable-Pull Up          | Disabled    |        | <p>This field enables the selected I/O pin weak pull-up.</p> <p><b>NOTE: The weak pull-up resistor is pull-up to VDD_IO.</b></p> <p><b>When enabling pull-up for input pins, the input signal voltage should not be higher than the VDD_IO voltage.</b></p>   |
| Inverse Polarity        | Disabled    |        | <p>This field inverts the selected I/O pin input and output signal polarity.</p>  |
| Output Driving Strength | 4mA         |        | <p>This field sets the output driving strength of the selected pin. (4mA up to 8mA) @VDDIO3.3V</p>  |

## 9.4 GPIO (GPB) Configuration

Also refer to Section 7.4 for the complete GPIO Multi-Function options description.

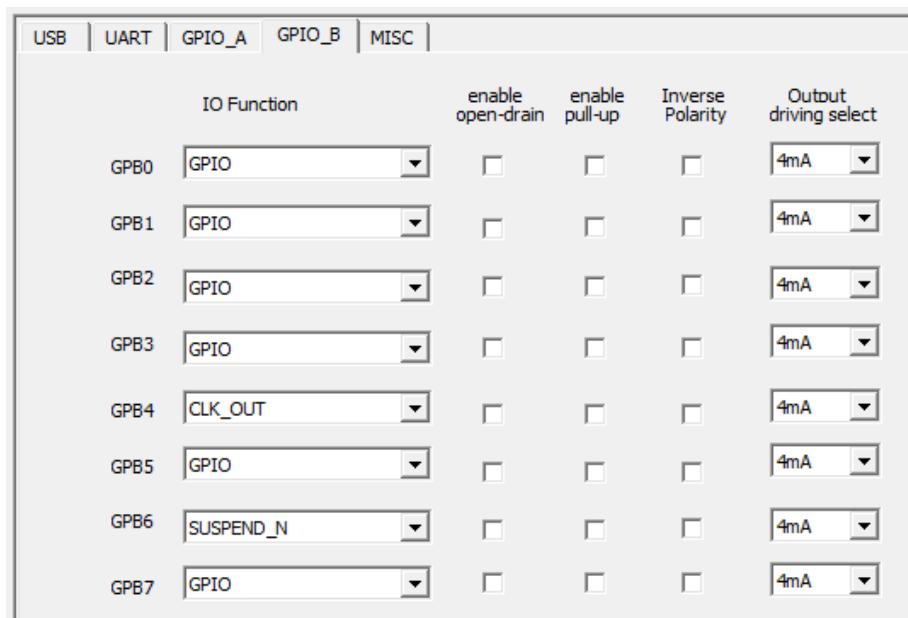


Table 9-4 GPIO (GPB Group) Configuration

| GPIO Function | Default Value | Default I/O | Description  |
|---------------|---------------|-------------|--|
| GPB0          | GPIO          | Input       | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• TX_LED</li> <li>• CLK_OUT (also refer to MISC folder)</li> </ul>  |
| GPB1          | GPIO          | Input       | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• RX_LED</li> <li>• TRX_LED</li> </ul>                              |
| GPB2          | GPIO          | Input       | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• VBUS_DET (also refer to MISC folder)</li> <li>• EE_SDA</li> </ul> |
| GPB3          | GPIO          | Input       | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• USB_CFG</li> <li>• EE_SCL</li> </ul>                              |

|                                |          |        |  |
|--------------------------------|----------|--------|--|
| GPB4                           | GPIO     | Input  | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• CLK_OUT (also refer to MISC folder)</li> <li>• BC_SUSP_N</li> </ul>                 |
| GPB5                           | GPIO     | Input  | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• BC_DET</li> </ul>   |
| GPB6                           | SUSP_N   | Output | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• USB_CFG</li> <li>• WAKEUP</li> <li>• CLK_OUT (also refer to MISC folder)</li> </ul> |
| GPB7                           | GPIO     | Input  | <p>This field allows setting the pin as a standard GPIO or any of the following function:</p> <ul style="list-style-type: none"> <li>• GPIO (General Purpose I/O)</li> <li>• TXEN</li> <li>• VBUS_DET (also refer to MISC folder)</li> </ul>                     |
| <b>Enable Open-Drain</b>       | Disabled |        | <p>This field sets the selected I/O pin to open-drain output mode.</p>   |
| <b>Enable-Pull Up</b>          | Disabled |        | <p>This field enables the selected I/O pin weak pull-up.</p> <p><b>NOTE: The weak pull-up resistor is pull-up to VDD_IO.</b><br/> <b>When enabling pull-up for input pins, the input signal voltage should not be higher than the VDD_IO voltage.</b></p>        |
| <b>Inverse Polarity</b>        | Disabled |        | <p>This field inverts the selected I/O pin input and output signal polarity.</p>   |
| <b>Output Driving Strength</b> | 4mA      |        | <p>This field sets the output driving strength of the selected pin. (4mA up to 8mA) @VDDIO3.3V</p>   |

## 9.5 Miscellaneous (MISC) Configuration

This folder includes other miscellaneous chip configuration options including VBUS\_DET, chip I/O suspend state, SUSP\_N, USB chip suspend, and clock output frequency divider options.

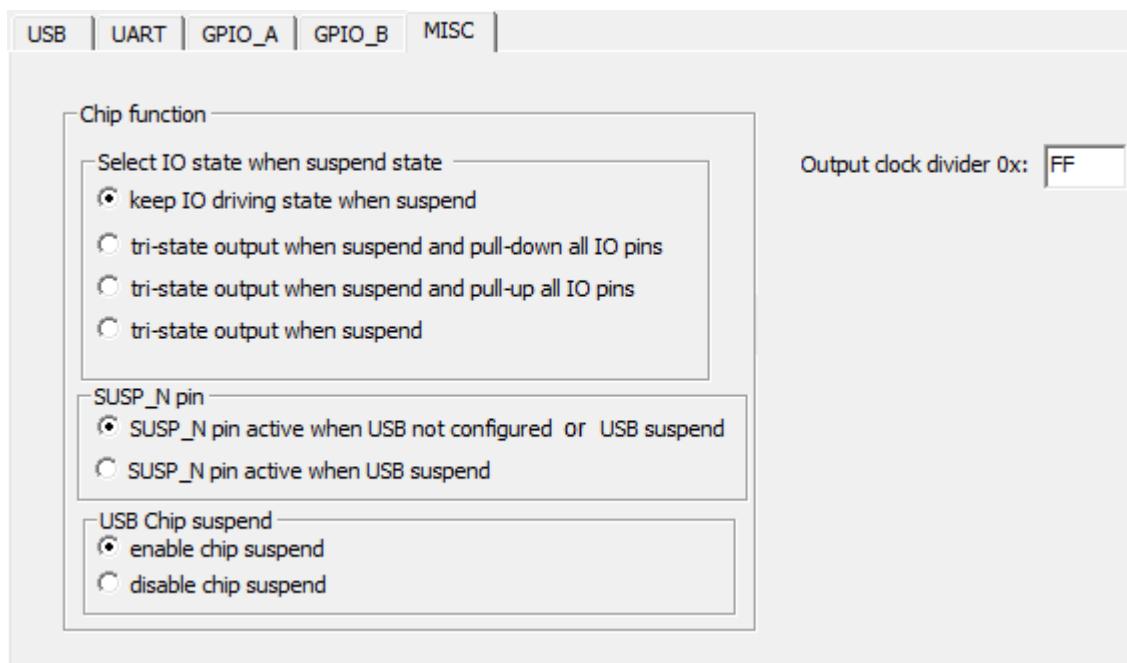


Table 9-5 Miscellaneous Configuration

| Functions                     | Default Value                                       | Description   |
|-------------------------------|---|---|
| <b>Suspend Mode I/O State</b> | Keep I/O Driving State                              | This option allows setting the I/O state when chip is in suspend mode.  |
| <b>SUSP_N Pin</b>             | Active when both USB not configured and USB suspend | This option allows setting the SUSP_N pin behavior when USB is not configured and in suspend state.   |
| <b>USB Chip Suspend</b>       | Enabled   | This option can enable or disable the USB chip to suspend.  |
| <b>Output Clock Divider</b>   | 0xFF  | <p>This field sets the output clock divider value. When value is 0, output clock pin will stay at low state. When value is 0xff, output clock pin will stay at high state. When other value, output clock rate is <math>24\text{MHz} / (1 + \text{clock divider value})</math>.</p> <p>The default value can be kept as is and let customer driver or user tool through SDK to dynamic change the clock divider rate.</p> |


## 10. Design Application Examples

This section illustrates conceptual design application examples using the PL2303GE.

### 10.1 USB Bus Powered Design

The PL2303GE has a built-in 3.3V regulator. USB device power (pin VIN) can be supplied directly from USB VBUS pin. The capacitor behind the USB connector on VBUS is a defined requirement of USB specification. If the regulator output VO\_33 needs to be maintained at 3.3V, VIN should be larger than 3.6V. It is also recommended to add capacitor at VO\_33 pin, please refer to schematic.

This built-in 3.3V regulator can supply 100mA in addition to providing chip operating power around 10mA. It is also possible to supply power to external components under the range limit.

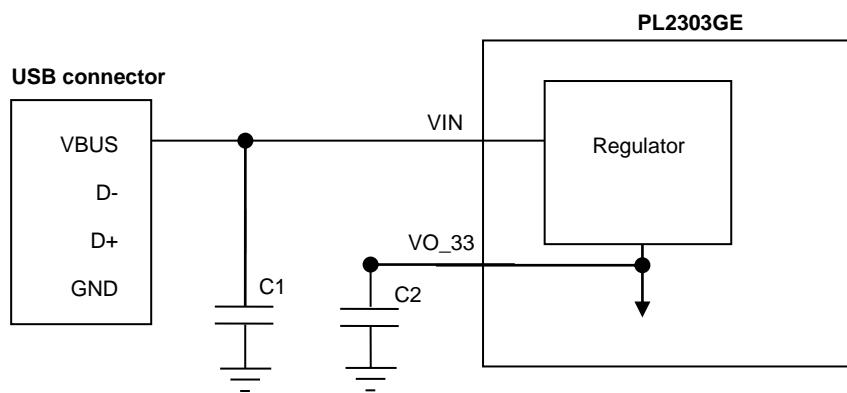

**Figure 10-1 USB Bus Powered Design Example**

### 10.2 Self Powered Design

The PL2303GE can also use external power supply. There are two possible ways to use external power source. The first is to use system power source to connect to VIN, and the chip's internal 3.3V regulator will generate the 3.3V power output VO\_33 for chip operations and external components. Below Figure 10-2a shows this case. The second is to disable the internal regulator where the system should provide the same 3.3V voltage to VIN and VO\_33. Under this condition, the chip will use this external 3.3V power as operating power source. See Figure 10-2b.

For USB self-powered design, it is also recommended to enable the VBUS\_DET GPIO input pin function because the PL2303GE DP pin will be pulled up after power on even if USB is not attached yet. USB specification states that a DP pull-up means to attach USB. If the VBUS\_DET pin function is turned on and connected to VBUS pin, the chip will only pull-up the DP pin to USB bus when VBUS\_DET is active.

To use self-powered design, USB power mode descriptor in the OTPROM or EEPROM of the PL2303GE chip should

also be programmed to self-powered mode to match this kind of configuration. USB hosts can read the USB descriptor of the device to know if it is a self-powered device.

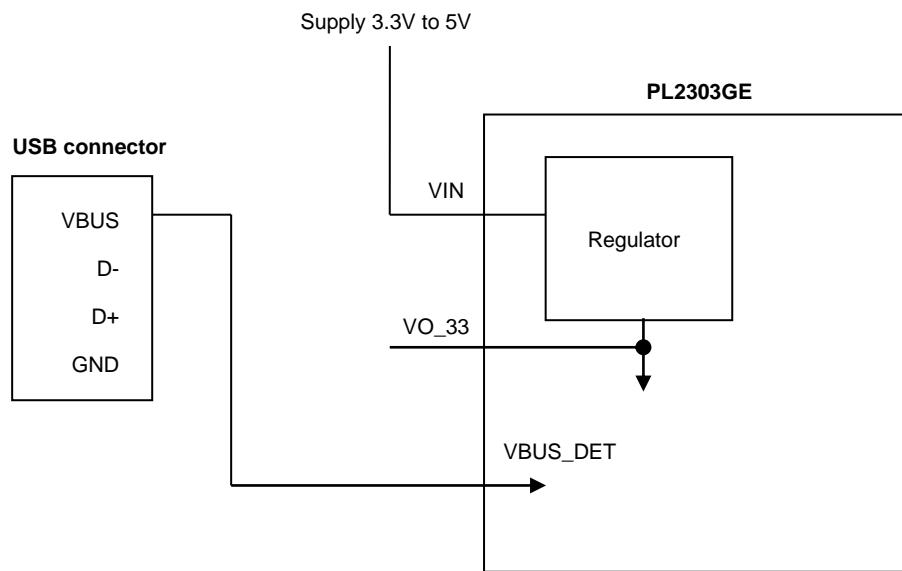


Figure 10-2a USB Self Powered Design Example 1


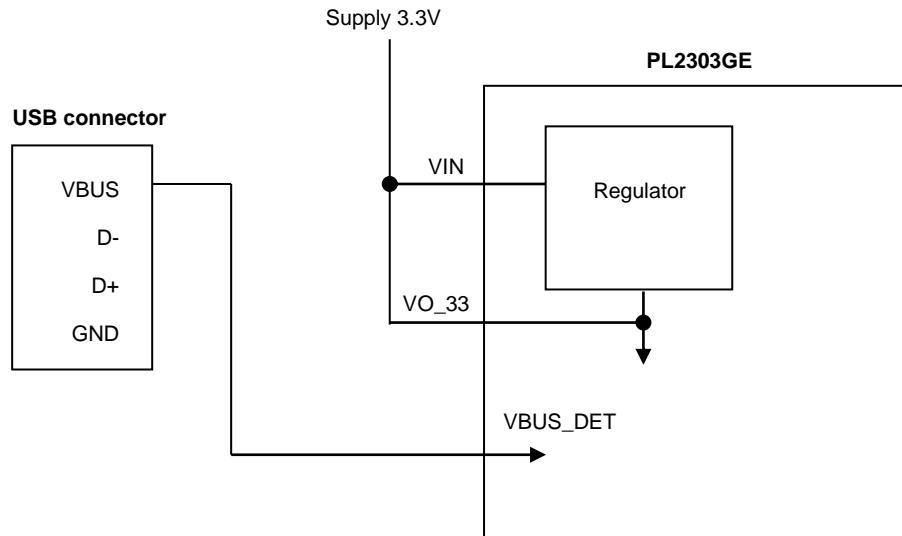


Figure 10-2b USB Self Powered Design Example 2


### 10.3 Chip Reset Control

The PL2303GE has an internal power on reset circuit; therefore, external reset control circuit is optional. External reset control (RESET\_N pin) can help system designs to make sure of chip operation start time.

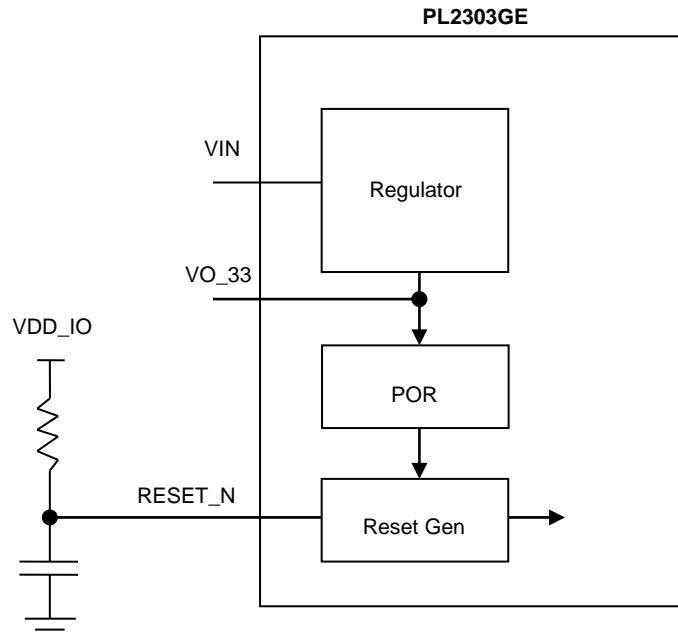

**Figure 10-3a Chip Reset Control Application**

The power ramp-up time shall keep below than 1ms as shown in diagram below.

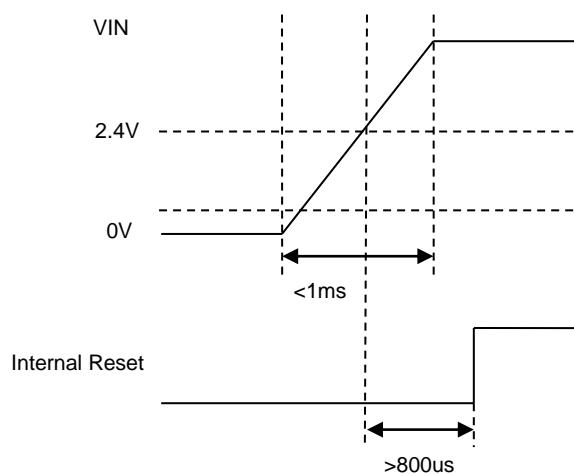

**Figure 10-3b Chip Power Reset Timing Diagram**

## 10.4 I/O Power Supply to PL2303GE

The PL2303GE supports a wide range of I/O voltage. The simple way to supply IO voltage is to directly connect VDD\_IO to VO\_33 pin to provide 3.3V I/O voltage. Add capacitor to VDD\_IO can help to reduce I/O noise. Please refer to schematic for the detailed capacitor value.

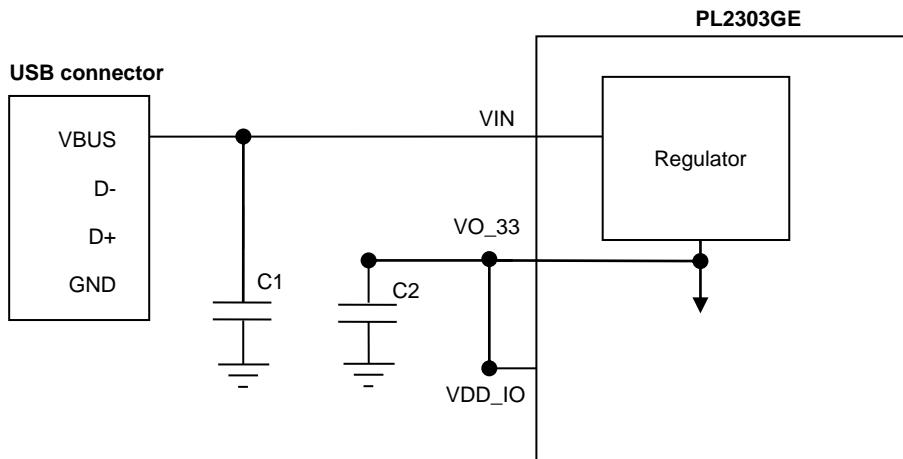


Figure 10-4a IO Power Supply

VDD\_IO can also be supplied from other power source to provide different I/O voltage. All of the PL2303GE I/O pins, including UART signals, use the same VDD\_IO voltage. The I/O pins does not support mixed I/O voltages. Unless open-drain option is enabled, the I/O connection between two chips shall use the same VDD\_IO voltage. PL2303GE I/O pin also supports 5V tolerance which allows 5V input signal level in different VDD\_IO voltage.

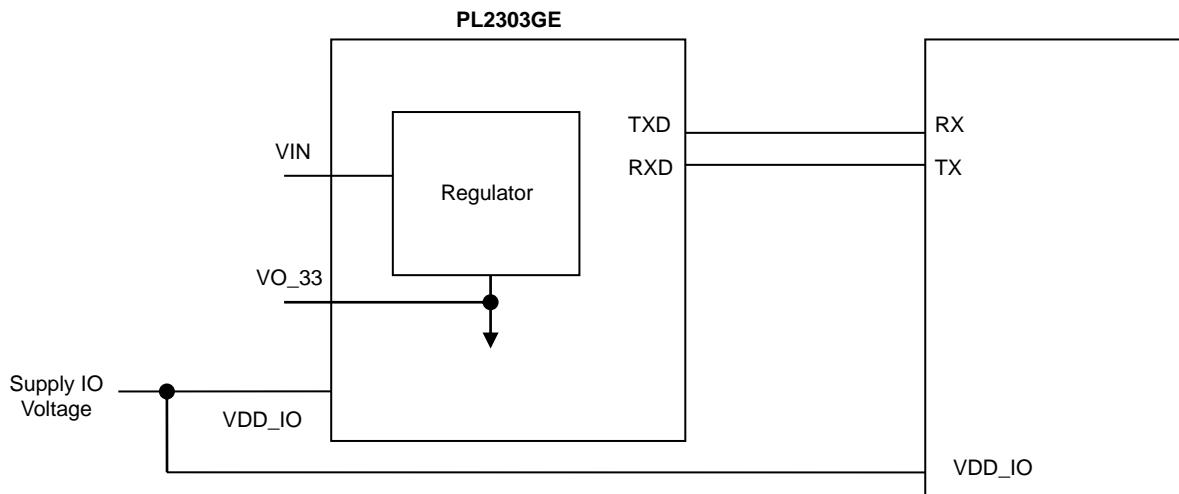


Figure 10-4b VDD\_IO Voltage Supply

## 10.5 USB to RS232 Cable Design

The most common design application for the PL2303GE is the USB to RS232 converter cable or adapter shown in the diagram below. This design pairs the PL2303GE with an RS232 transceiver chip (ex. SIPEX SP213EHCA) to convert the PL2303GE TTL levels serial interface to RS232 level signals. The design below includes the use of the SUSP\_N pin (SHTDN#) to power down the transceiver chip to sleep mode when in USB suspend mode. The default OTPROM supports this function directly and no need to program the OTP for special GPIO setting. Below diagram also shows an access LED example on how to make use of GPB0 and GPB1 pins which are configured as TX and RX access LED.

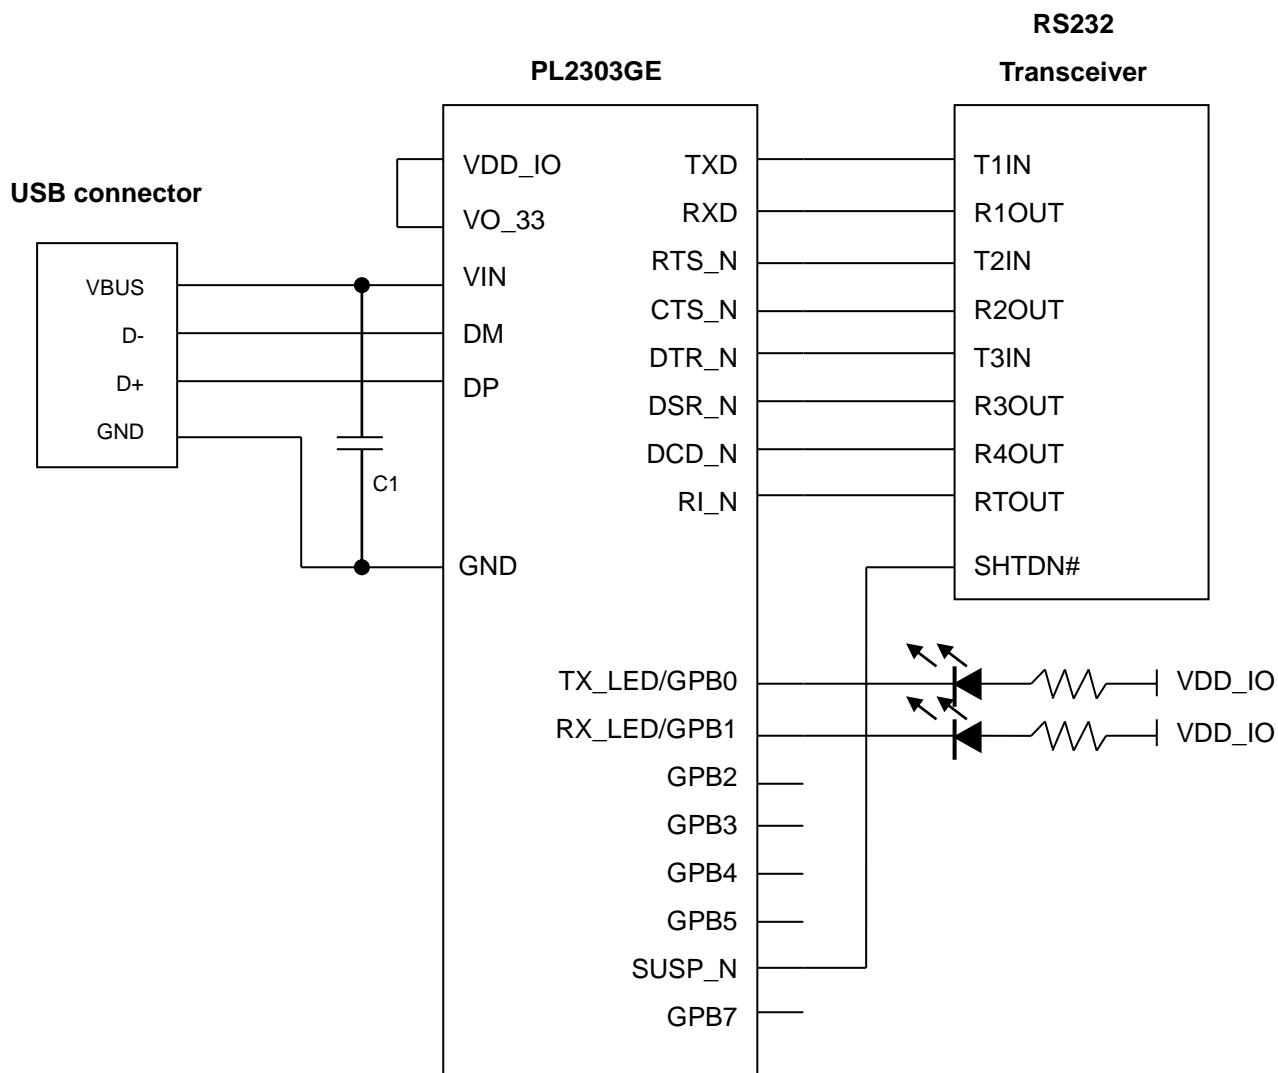


Figure 10-5 USB to RS232 Design Example

## 10.6 USB to RS485/RS422

Another popular application for the PL2303GE is the USB to RS485/422 design. For RS485, the chip is paired with an RS485 transceiver chip to convert the serial interface of the PL2303GE to RS485 levels. RS485 transceivers are only enabled when data is being transmitted. Hence, it needs to use the TX\_EN (transmit enable) GPB7 GPIO pin to connect to the RS485 transceiver output enable pin and enable this pin function using the OTPROM software. This application can also make use of the GPB0 and GPB1 pins configured as TX and RX access LED.

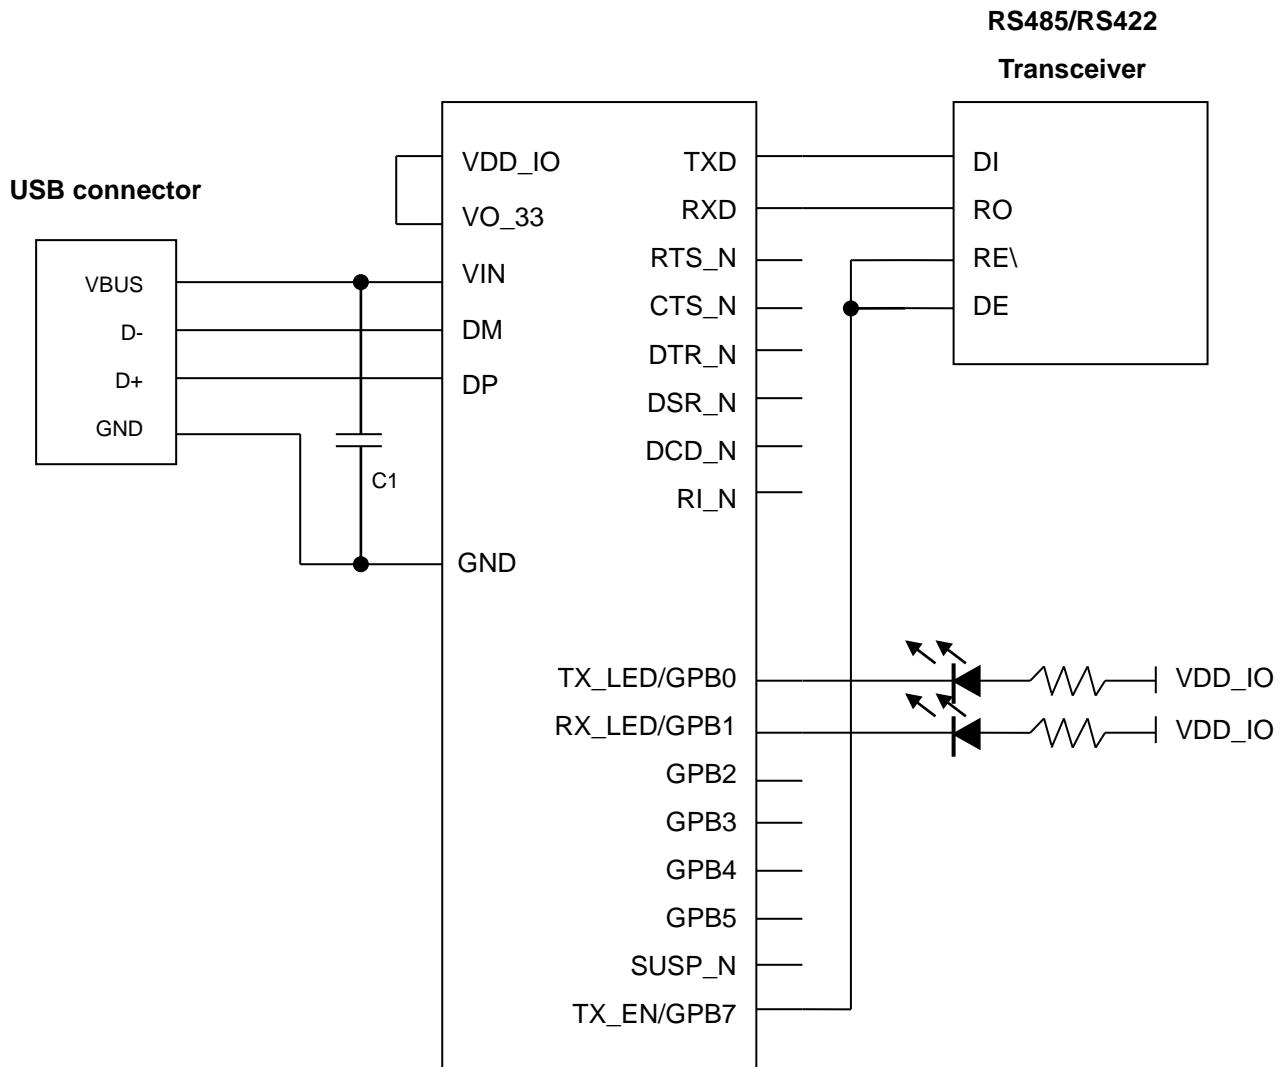


Figure 10-6 USB to RS485/422 Design Example

## 10.7 Battery Charging Support

The PL2303GE supports USB battery charging specification (BC1.2) wherein battery charging controller can use signals from PL2303GE to control the charging current. An example of charging control concept is shown in below diagram.

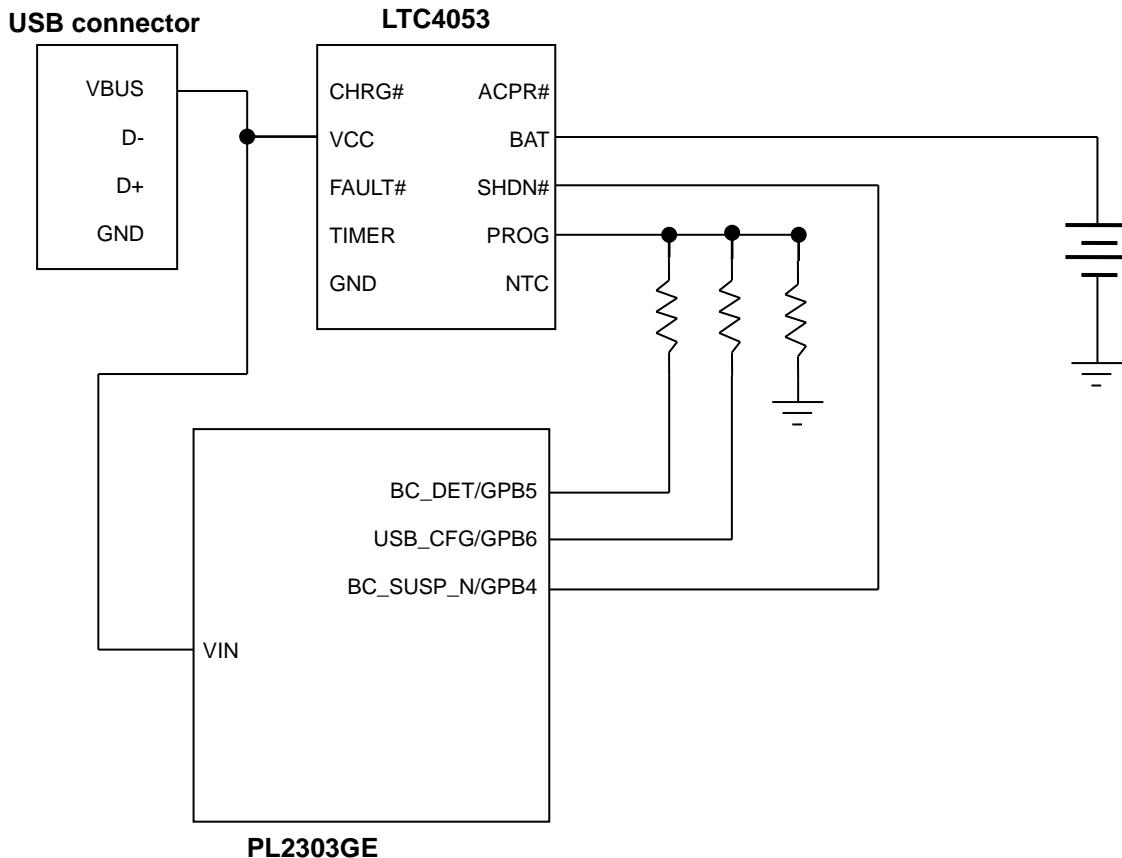


Figure 10-7a Battery Charging Design Example #1

This concept diagram uses the GPB5 GPIO pin configured as BC\_DET (battery charge detect pin) signal and this pin need to set to inverse polarity and open-drain mode. GPB6 GPIO pin is configured as USB\_CFG and is also set to inverse polarity and open-drain mode. GPB4 GPIO pin is configured as BC\_SUSP\_N function and connected to shutdown signal of charging controller. All above signals can achieve charging conditions as below table.

| Charging Condition | Charging Current (max) | BC_SUSP_N | USB_CFG | BC_DET |
|--------------------|------------------------|-----------|---------|--------|
| Suspend            | 2.5mA                  | 0         | x       | x      |
| Un-configured      | 100mA                  | 1         | 1       | 1      |
| Operation          | 500mA                  | 1         | 0       | 1      |
| Fast Charging      | 1500mA                 | 1         | 1       | 0      |

Below is another example of charging controller support concept.

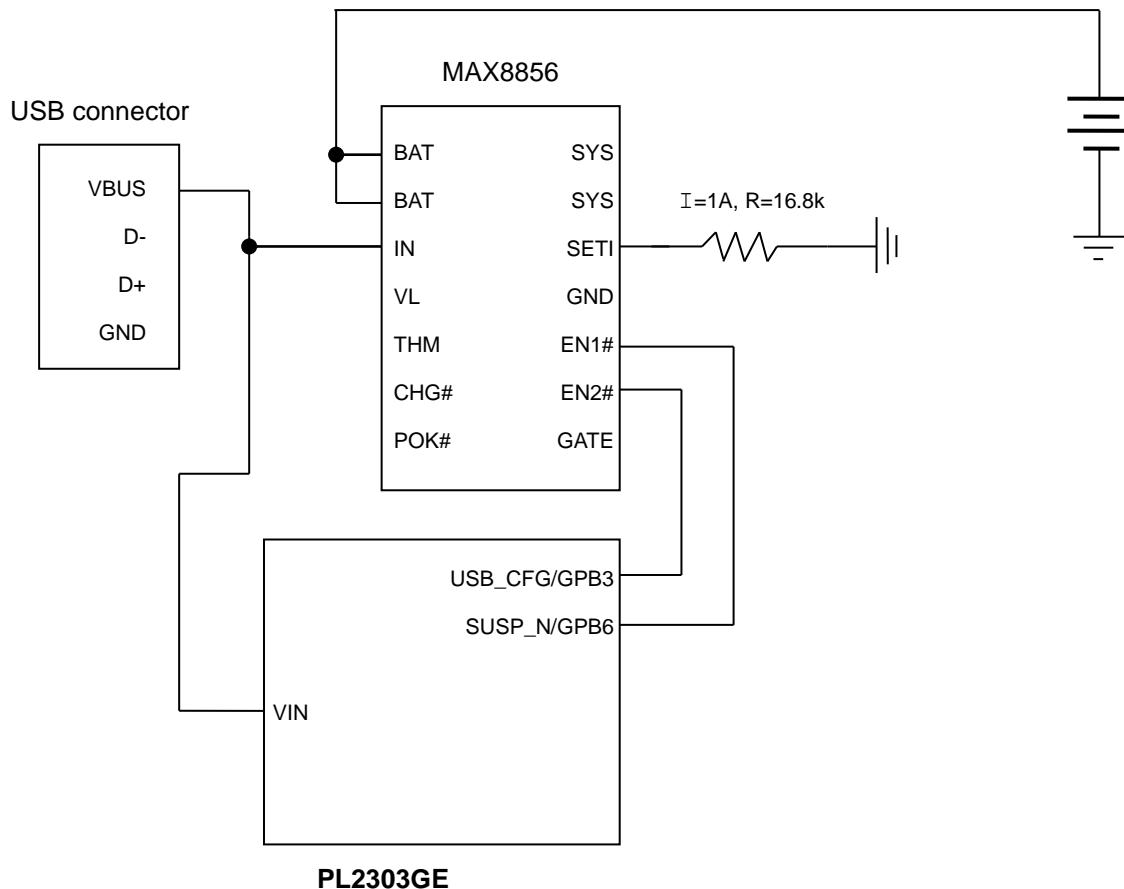


Figure 10-7b Battery Charging Design Example #2

The above concept diagram uses GPB3 pin as USB\_CFG and set to normal polarity and push-pull I/O mode as default. GPB6 pin is configured as SUSP\_N and set to inverse polarity and push-pull IO mode. The SUSP\_N option is also set active during USB bus suspend state only, and not when USB is not configured. This concept diagram can achieve charging conditions as below table.

| Charging Condition | Charging Current (max) | SUSP_N | USB_CFG |
|--------------------|------------------------|--------|---------|
| Suspend            | 2.5mA                  | 1      | 1       |
| Un-configured      | 100mA                  | 0      | 0       |
| Operation          | 500mA                  | 0      | 1       |
| Fast Charging      | 1000mA                 | 1      | 0       |

## 10.8 External I2C EEPROM Support

The PL2303GE can also support an external I2C EEPROM to override the OTPROM settings. To use an external EEPROM, it needs to program the OTPROM to enable the external I2C EEPROM support. There are two options, one is to use the GPB2 pin as I2C SDA and the GPB3 pin as I2C SCL; the other option is to use GPA4(DTR\_N) pin as I2C SDA and GPA5(DSR\_N) pin as I2C SCL.

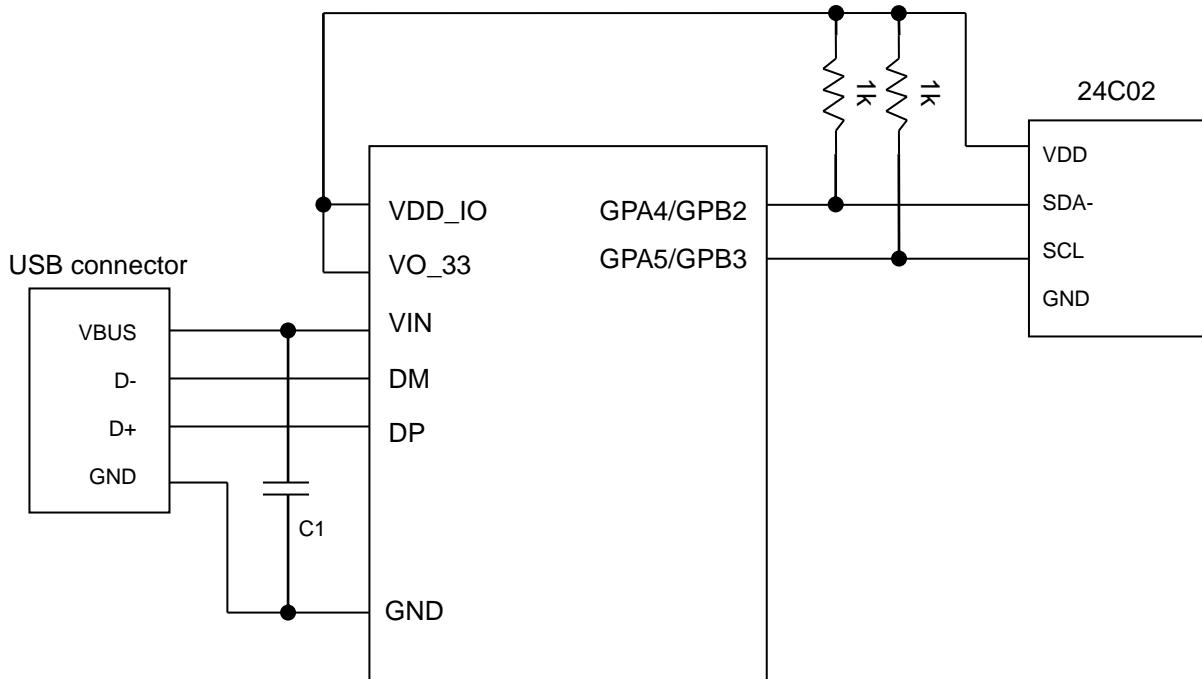


Figure 10-8 External I2C EEPROM Design Example

There is signature field in external EEPROM space. When this field content is valid, the PL2303GE will load the external EEPROM contents and override the settings defined in the OTPROM. Detailed information can be checked with OTPROM and EEPROM software programming tool. The supported external I2C EEPROM size is 256 bytes.

## 11. DC & Temperature Characteristics

### 11.1 Absolute Maximum Ratings

Table 11-1 Absolute Maximum Ratings

| Items                                   | Ratings           |
|---|-------------------|
| Power Supply Voltage – VIN              | -0.3 to 6.0 V     |
| Input Voltage of VDD_IO                 | -0.3 to VIN+0.3 V |
| Input Voltage I/O with 5V Tolerance I/O | -0.3 to 6.0 V     |
| Storage Temperature                     | -40 to 150 °C     |
| Thermal Resistance ( $\theta_{jc}$ )    | 31 °C/W (SSOP28)  |

Note: Permanent device damage may occur if the absolute maximum ratings are exceeded. These are stress rating only, and functional operation should be restricted to within the conditions. Exposure to absolute maximum rating conditions for extended periods may affect the device's reliability.

### 11.2 DC Characteristics

#### 11.2.1 Operating Voltage and Suspend Current

Table 11-2a Operating Voltage and Suspend Current

| Parameter  | Symbol           | Min  | Typ | Max     | Unit |
|--|------------------|------|-----|---------|------|
| Power Supply Voltage Range                           | VIN              | 2.8  | 5   | 5.5     | V    |
| Power Supply for I/O Pins                            | VDD_IO           | 1.8  | 3.3 | VIN+0.3 | V    |
| Output Voltage of Regulator                          | VO_33            | 2.97 | 3.3 | 3.63    | V    |
| Operating Current <sup>(1)</sup> (Power Consumption) | I <sub>DD</sub>  | -    | 9.5 | 15      | mA   |
| Suspend Current                                      | I <sub>SUS</sub> | -    | 260 | 450     | μA   |

Note: (1) – No device connected.

#### 11.2.2 I/O Pins

Table 11-2b I/O Pins

| Parameter            | Symbol          | Min         | Typ | Max | Unit |
|----------------------|-----------------|-------------|-----|-----|------|
| Input Voltage (CMOS) | V <sub>IL</sub> | --          | --  | 0.4 | V    |
|                      | V <sub>IH</sub> | 0.7* VDD_IO | --  | --  | V    |
| Output Voltage       | V <sub>OL</sub> | --          | --  | 0.4 | V    |
|                      | V <sub>OH</sub> | 0.7*VDD_IO  | --  | --  | V    |

### 11.3 ESD Protection

Table 11-3 ESD Protection

| Item                   | Condition   | Typ | Unit |
|------------------------|---|-----|------|
| ESD Protection Voltage | Human Body Model (HBM) - All pins except for USB port | ±4  | kV   |
|                        | Human Body Model (HBM) - USB Port                     | ±15 |      |
|                        | IEC 61000-4-2, Contact Discharge - USB Port           | ±8  |      |
|                        | IEC 61000-4-2, Air-Gap Discharge - USB Port           | ±15 |      |

### 11.4 Temperature Characteristics

Table 11-4 Temperature Characteristics

| Parameter                       | Symbol         | Min | Typ | Max | Unit |
|---------------------------------|----------------|-----|-----|-----|------|
| Operating Temperature (ambient) | --             | -40 | --  | 85  | °C   |
| Junction Operation Temperature  | T <sub>J</sub> | -40 | 25  | 125 | °C   |

### 11.5 Baud Rate Characteristics

Table 11-5 Baud Rate Characteristics

| Parameter                            | Symbol | Min | Typ | Max | Unit |
|--------------------------------------|--------|-----|-----|-----|------|
| Baud rate @ VDD <sub>IO</sub> = 5V   | --     | 1   | --  | 12M | bps  |
| Baud rate @ VDD <sub>IO</sub> = 3.3V | --     | 1   | --  | 12M | bps  |
| Baud rate @ VDD <sub>IO</sub> = 1.8V | --     | 1   | --  | 6M  | bps  |

## 12. Outline Diagram

### 12.1 Chip Marking information

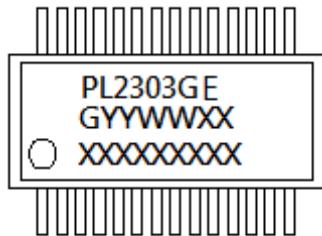


Figure 12-1 Chip Part Number Information (SSOP)

Table 12-2 Chip Marking Information


| Line                     | Marking    | Description                               |
|--------------------------|------------|---|
| First Line               | PL2303GE   | Chip Product Name                         |
| Second Line<br>(GYYWWXX) | G          | Green packing material                    |
|                          | YY         | Last two digits of the manufacturing year |
|                          | WW         | Week number of the manufacturing year     |
|                          | XX         | Chip Version                              |
| Third Line               | XXXXXXXXXX | Manufacturing LOT code                    |

Example: "G19361A" – means Green packing + Year 2019 + Week no. 36 + 1A chip version.

### 12.2 SSOP28 Package

Table 12-1 Package Dimension


| Symbol | Millimeter |      |      | Inch  |        |       |
|--------|------------|------|------|-------|--------|-------|
|        | Min        | Nom  | Max  | Min   | Nom    | Max   |
| b      | 0.22       |      | 0.38 | 0.009 |        | 0.015 |
| E      | 7.40       | 7.80 | 8.20 | 0.291 | 0.307  | 0.323 |
| E1     | 5.00       | 5.30 | 5.60 | 0.197 | 0.209  | 0.220 |
| L      | 0.55       | 0.75 | 0.95 | 0.021 | 0.030  | 0.037 |
| R1     | 0.09       |      |      | 0.004 |        |       |
| D      | 9.9        | 10.2 | 10.5 | 0.390 | 0.402  | 0.413 |
| A      |            |      | 2.0  |       |        | 0.079 |
| e      |            | 0.65 |      |       | 0.0256 |       |
| L1     |            | 1.25 |      |       | 0.050  |       |
| A1     | 0.05       |      |      | 0.020 |        |       |
| A2     | 1.65       | 1.75 | 1.85 | 0.065 | 0.069  | 0.073 |

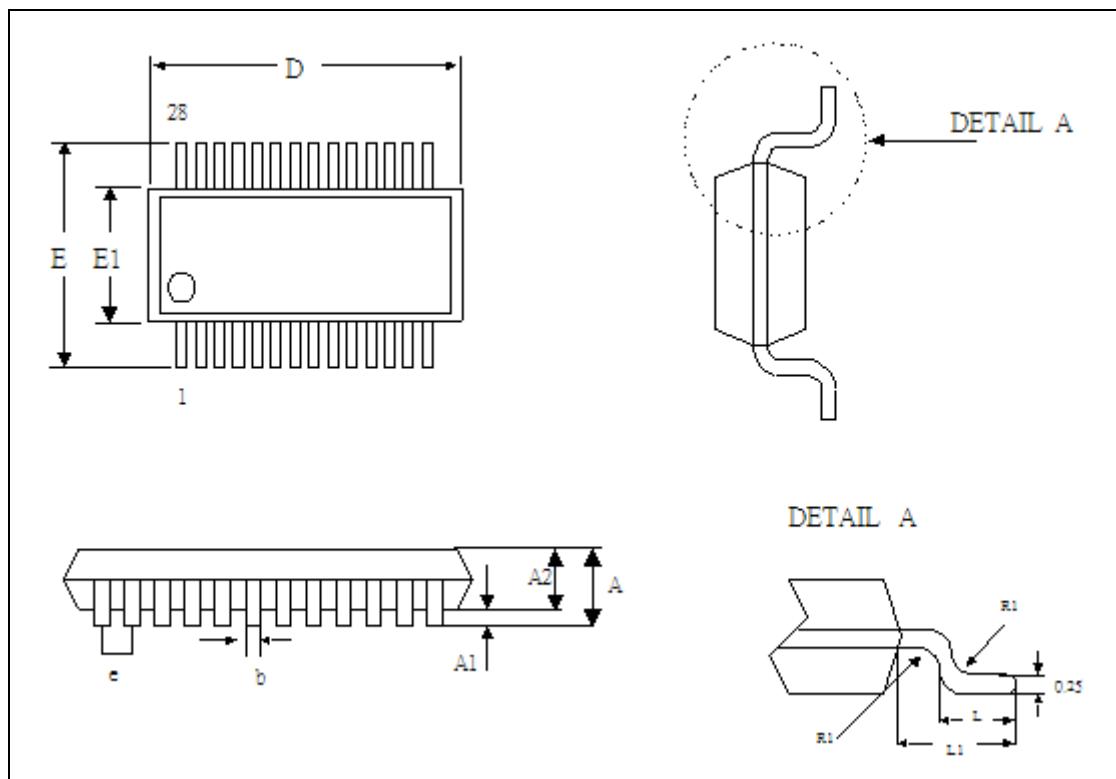

**Figure 12-1 PL2303GE Outline Diagram (SSOP28)**

## 13. Packing Information


### 13.1 Carrier Tape (SSOP-28)

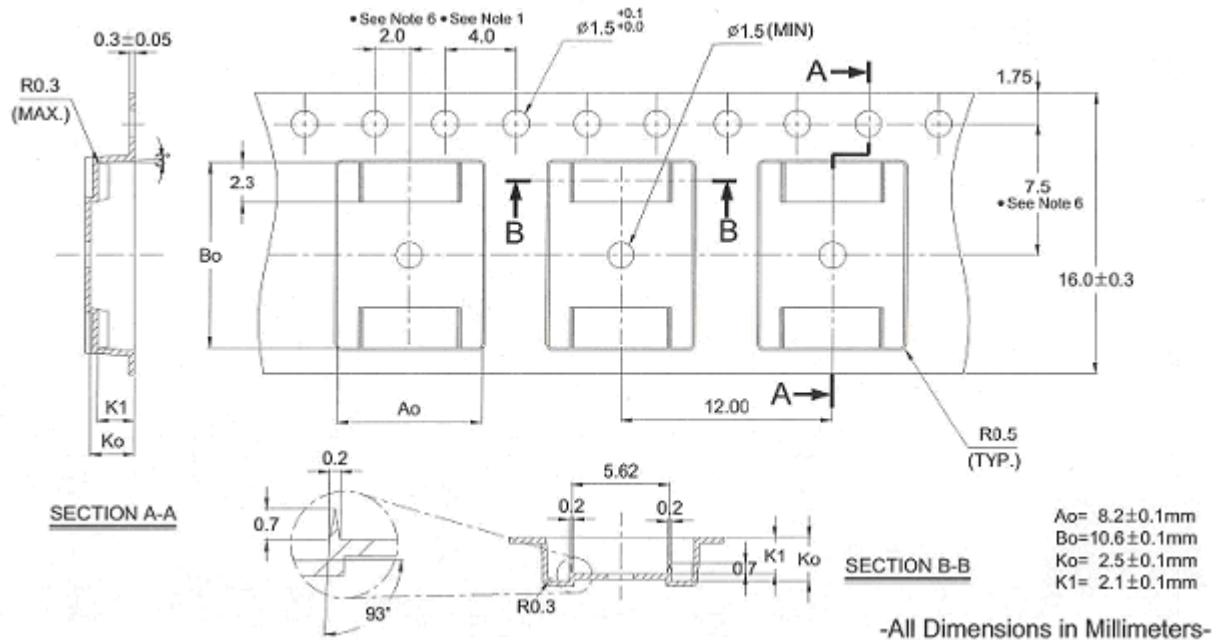

**Figure 13-1a SSOP28 Carrier Tape**

## Notes:

- 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$
- Camber not to exceed 1mm in 100mm.
- Material: Black Polystyrene.
- $A_o$  and  $B_o$  measured on a plane 0.3mm above the bottom of the pocket.
- $K_o$  measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
- IC quantity per one reel: 2,000 pieces (MOQ)

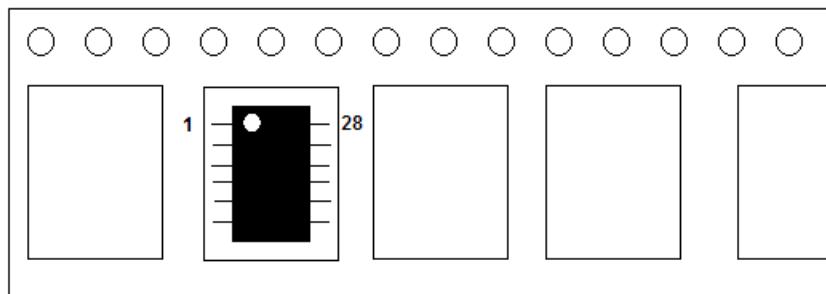

**Figure 13-1b IC Reel Placements**

## 13.2 Reel Dimension


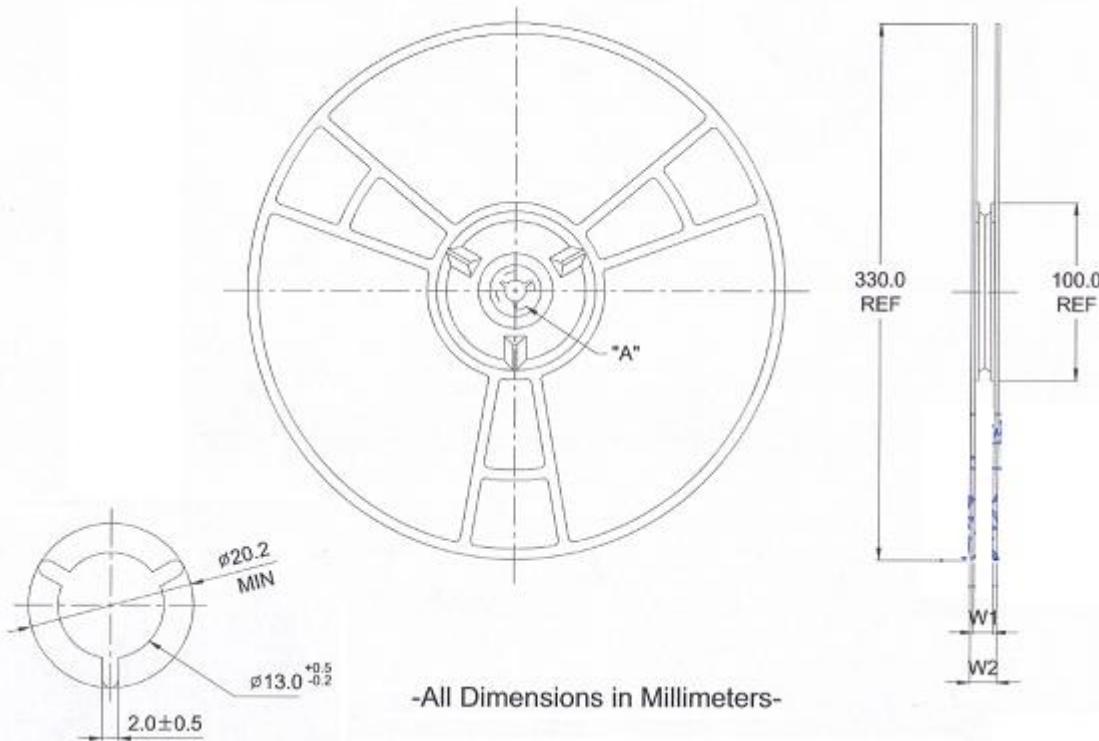


Figure 13-2 Reel Dimension

Table 13-1 Reel Part Number Information

| Package | Part Number               | Normal Hub Width | W1 +0.3mm<br>-0.2mm | W2 Max |
|---------|---------------------------|------------------|---------------------|--------|
| SSOP28  | RD33008SW-T + RD33008SW-T | 16mm             | 16.8mm              | 22.2mm |

### 13.3 Tube Packing

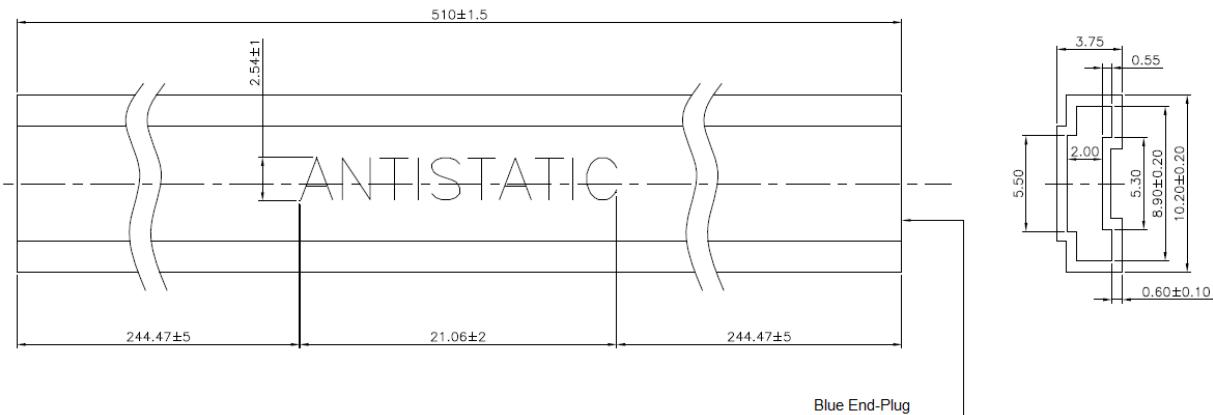

**Figure 13-3 Tube Packing Dimension**

REMARK :

- 1.TUBE MTL : PVC,COATING WITH ANTISTATIC LIQUID.
- 2.COLOR : TUBE - TRANSPARENT ; MARK - BLUE
- 3.SURFACE RESISTANCE :  $10^8 \sim 10^{11}$  • /□
- 4.NO BURR AT CUTTING AREA.
- 5.THE TUBE SHALL WITH BLUE END-PLUG(3088-060-01681) FROM VENDOR, TAIL DOWNWARD AND THE OTHER ONE ENCLOSE TOGETHER WITH SHIPMENT.

## Disclaimer

All the information in this document is subject to change without prior notice. Prolific Technology Inc. does not make any representations or any warranties (implied or otherwise) regarding the accuracy and completeness of this document and shall in no event be liable for any loss of profit or any other commercial damage, including but not limited to special, incidental, consequential, or other damages.

## Trademarks

The Prolific logo is a registered trademark of Prolific Technology Inc. All brand names and product names used in this document are trademarks or registered trademarks of their respective holders.

## Copyrights

**Copyright © 2019 - 2025 Prolific Technology Inc. All rights reserved.**

No part of this document may be reproduced or transmitted in any form by any means without the express written permission of Prolific Technology Inc.