


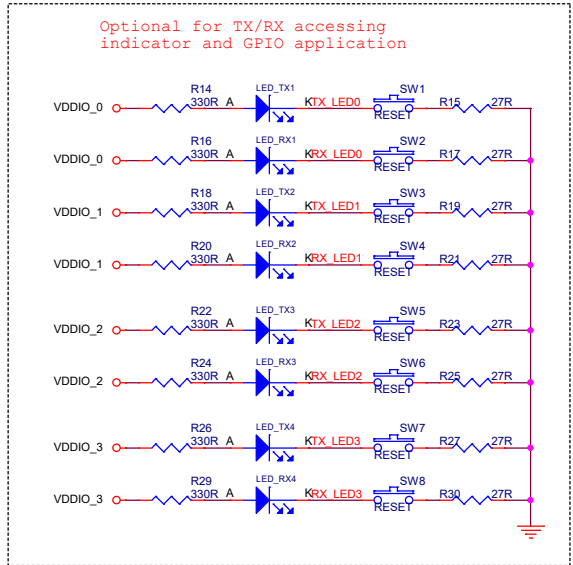

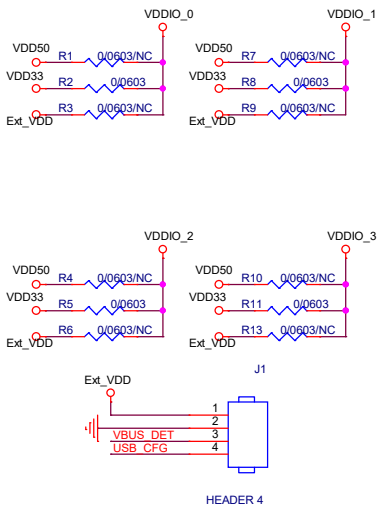

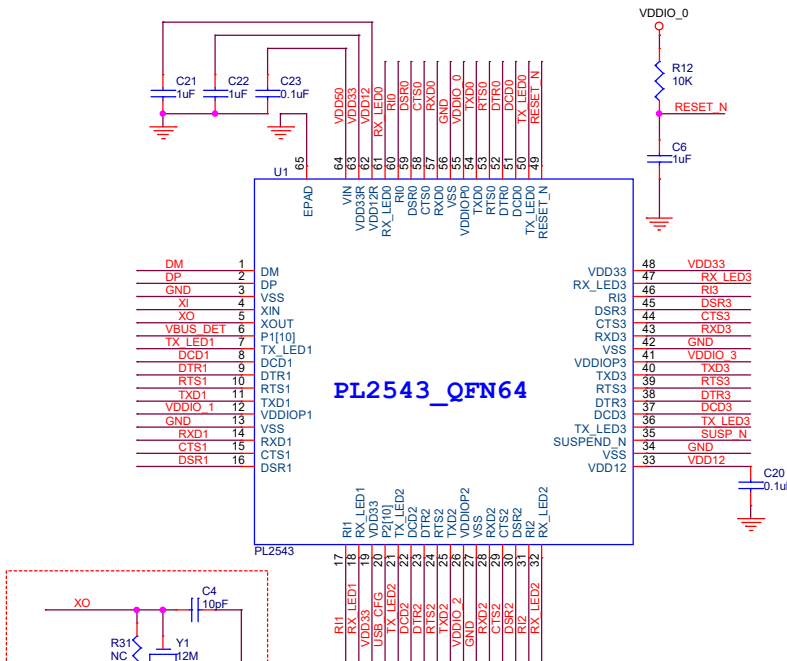






Note:
1.R33 for USB bus-powered
2.R32 for 3.3V self-powered
3.Either R33 or R32 is applied





RS-232 Transceiver-0

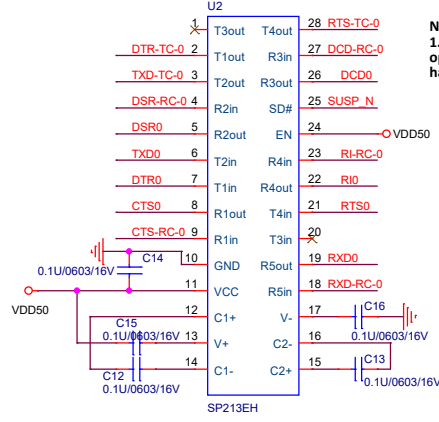



RS-232 Transceiver-2

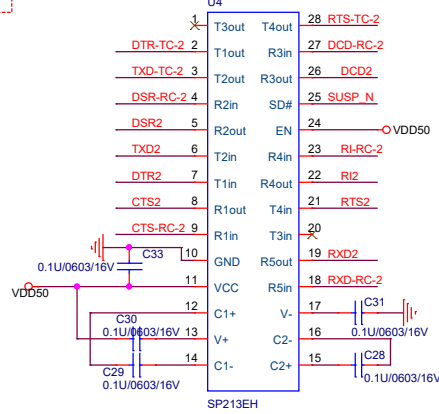

RS-232 Transceiver-1

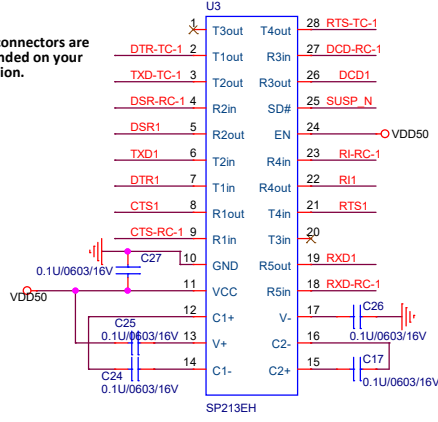

RS-232 Transceiver-3

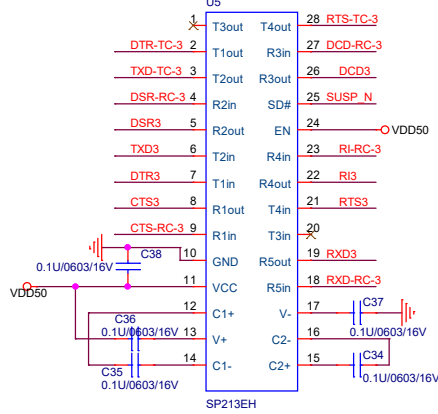

Note:
1. SP213 and DB9 connectors are optional and depended on your hardware application.