


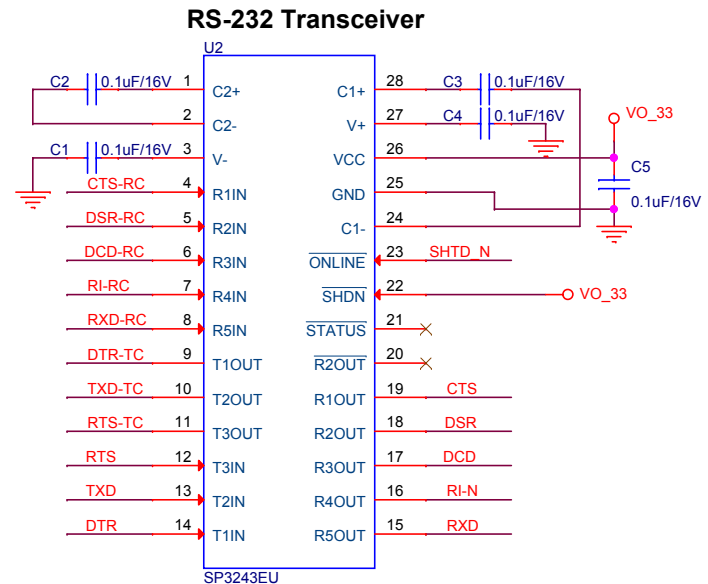


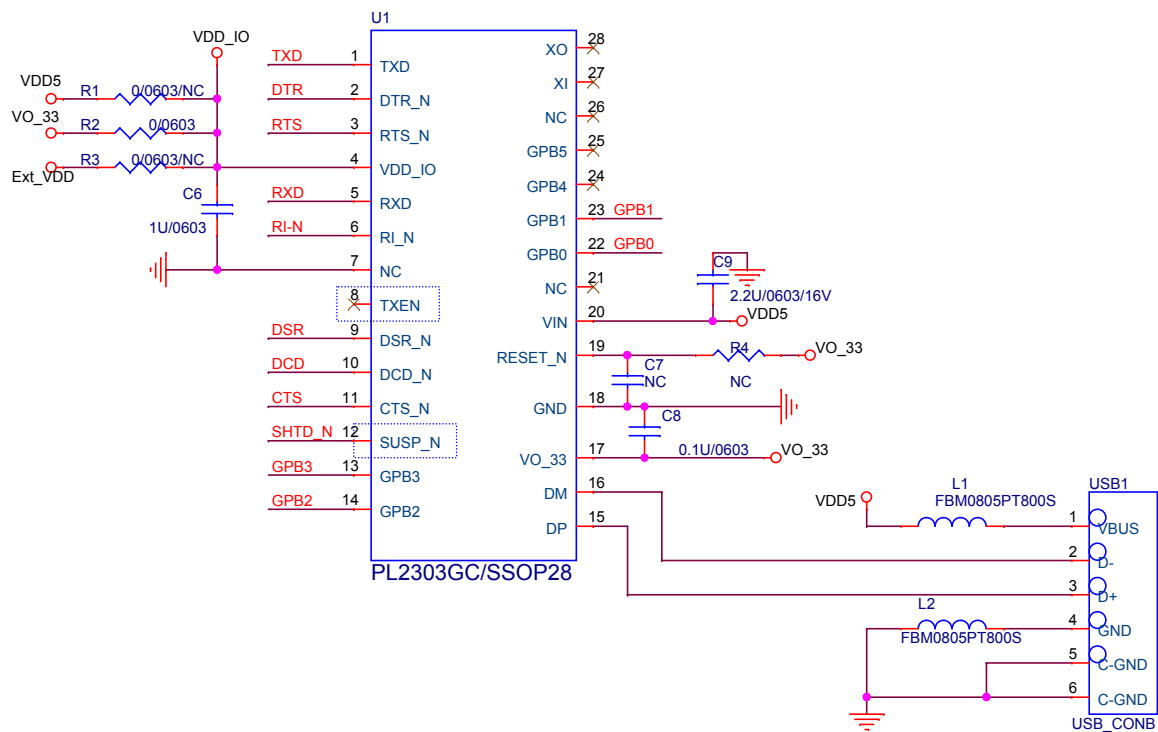


Note:
 1. The power supply range of SP3243 is +3.0V to +5.5V
 2. J1, SP3243(U2) and DB9(P1) connectors are optional and depended on your hardware application.

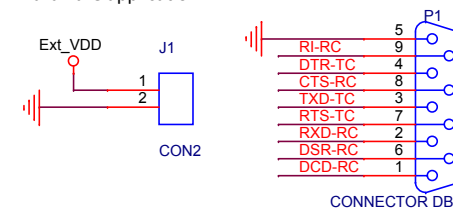

Optional for setting of chip and USB descriptor

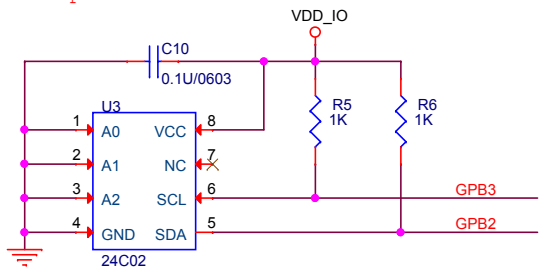

Optional for TX/RX accessing indicator and GPIO application

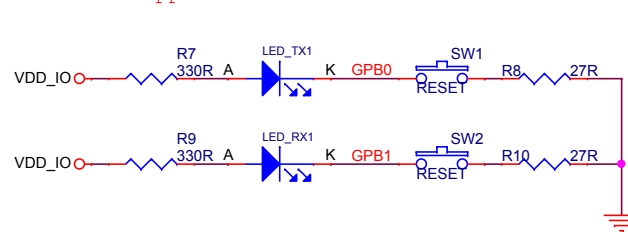

Drawing Name		Designer	Size
PL2303GC_SSOP28_Reference schematics			
Version	Date	Sheet	
1.3	2/14/2019	1 of 1	