

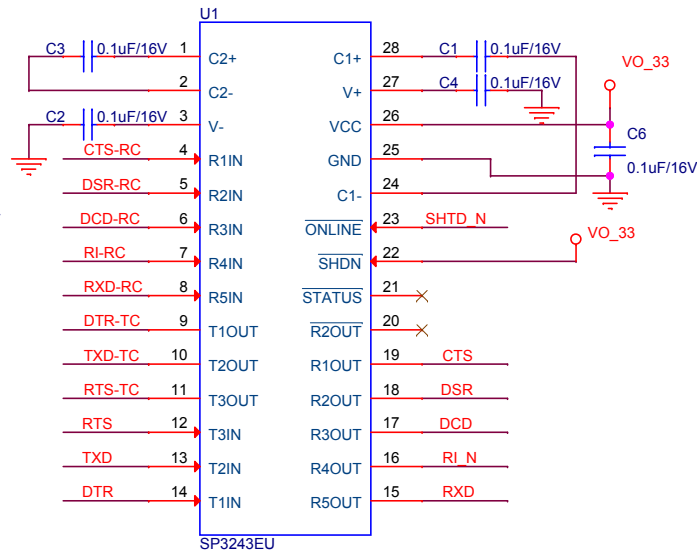
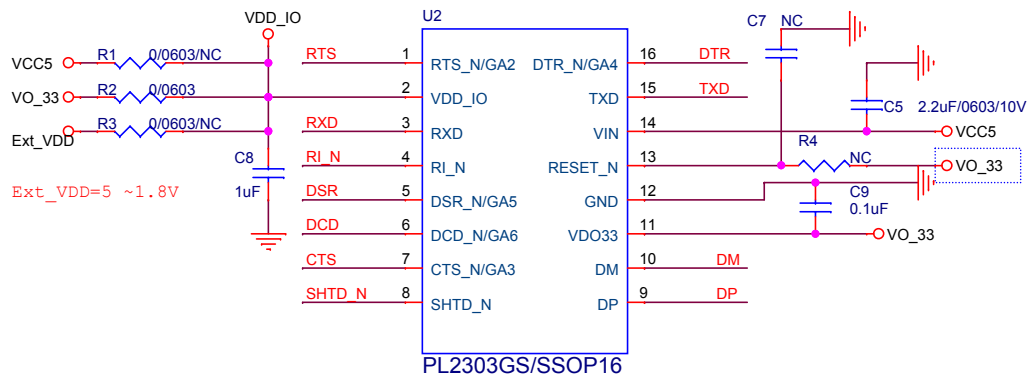


Note:
1. The power supply range of SP3243 is +3.0V to +5.5V
2. SP3243(U1) and DB9(P1), J1, J2 connectors are optional and depended on your hardware application.


Optional for setting of feature and USB descriptor

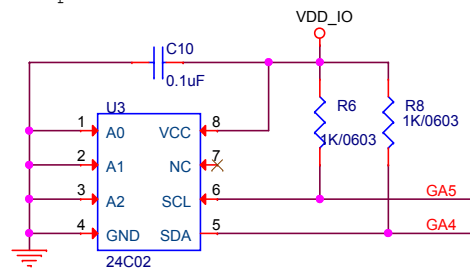

Optional for TX/RX accessing indicator

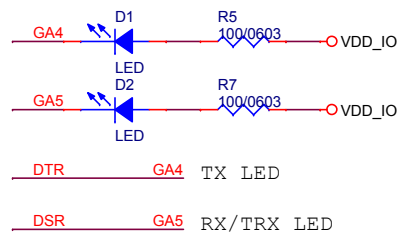

Note:
1.GA4 and GA5 are used for connecting EEPROM(U3), RS-232 Transceivers(U1) and LED indicators.
Only one of these three functions can be used.

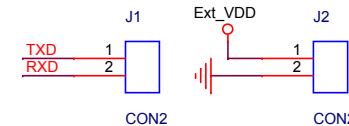

Title		
Prolific Technology Inc		
Size	Document Number	Rev
Custom	PL2303GS reference schematics	1.4
Date:	Monday, December 17, 2018	Sheet 1 of 1