

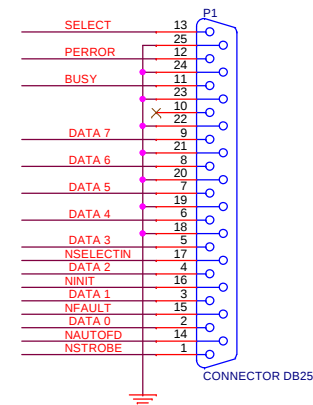
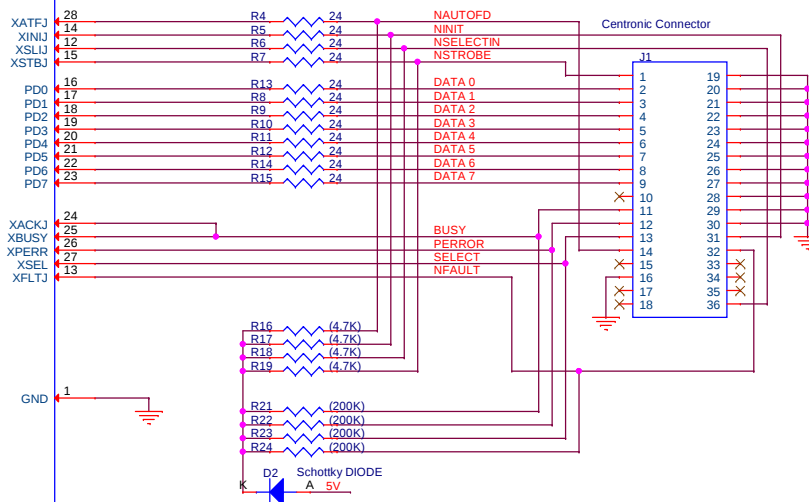




USB TYPE B

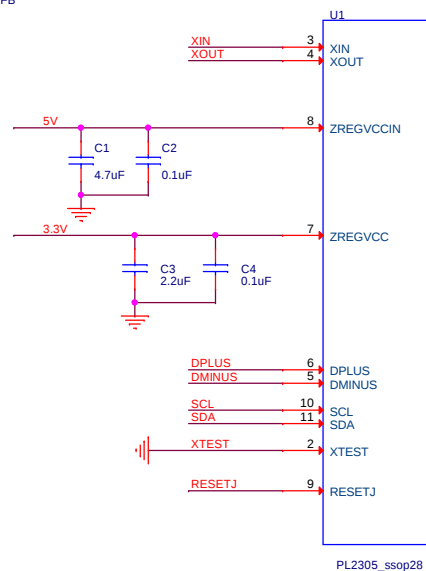


C5 should be placed to close to U2

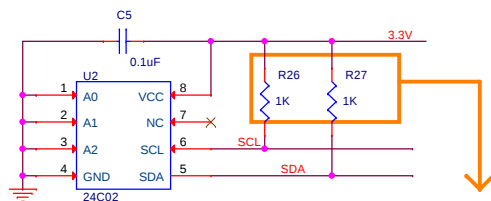

R26, R27 must be mounted with or without U2(24C02).



The traces inside this block should be wider.
And, this circuit should be placed to close to U1



NOTE: Part Value of some components with () means that
it should not be mounted at current time (e.g. R25).

Prolific Technology Inc.

Size	Document Number	Rev
B	PL2305 - USB to Parallel Converter	1.2
Date:	Wednesday, April 20, 2016	Sheet 1 of 1